

INVISIBLE SLOT

Recessed Mount Channel

For seamless lines of light that blends directly into the wall or substrate, the invisible channel is a premium solution to applications where modern and clean looks are a must. Simply install during the new construction drywalling phase by perfectly blending the channel into its surroundings. Once completed, all you are left with is a stunning line of light seamlessly incorporated into the wall or substrate.

- Recessed channel extrusion best suited for drywall applications
- Create seamless lines of light that blends into existing substrates
- Frosted lens protects lights source while evenly diffusing light
- Anodized aluminum provides excellent heat dissipation
- Field cuttable channel and lens
- Compatible with 10-12mm wide tape light with HD connectors

Available Finishes



Aluminum

Compatible Tape Light

- Single Color (10mm) + HD Connectors
- Tunable CCT (10mm) + HD Connector
- RGB (10mm) + HD Connector
- RGBW (12mm) / RGBTW (12mm) + HD Connector

PROJECT:

TYPE:

LOCATION:

CATALOG NUMBER:



INVISIBLE SLOT ORDERING INFORMATION

ITEM NUMBER	DESCRIPTION
PE-INVSLLOT-2M	2M Invisible Slot Aluminum Channel
PE-SLOTLENS-2M	2M Frosted Polycarbonate Lens
PE-SLOTLENS-3M	3M Frosted Polycarbonate Lens (Special Order)
PE-SLOTLENS-6M	6M Frosted Polycarbonate Lens (Special Order)
PE-INVSLLOT-END	Invisible Slot End Cap
PE-INVSLLOT-PROTECT-1M	1M Protective Insert (for mud-in installation)
PE-INVSLLOT-PROTECT-2M	2M Protective Insert (for mud-in installation)
PE-180-CON	180° End-toEnd Connector
PE-90-CON	90° End-toEnd Connector

INVISIBLE SLOT ACCESSORIES




PE-180-CON




PE-90-CON

INVISIBLE SLOT DIMENSIONS

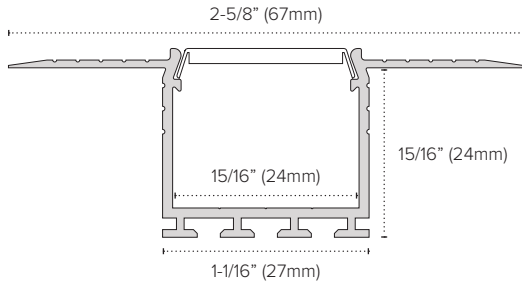


Drywall Installation Example

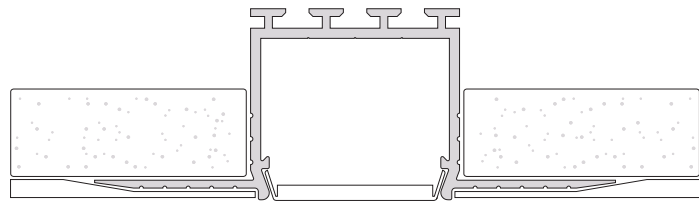

INVISIBLE SLOT PRE-MADE COUPLERS

ITEM NUMBER	DESCRIPTION
PE-INVSLOT-90	90 degree coupler for Invisible Slot extrusion with SLOTLENS
PE-INVSLOT-90VE	90 degree coupler (exterior face) for Invisible Slot extrusion with SLOTLENS
PE-INVSLOT-90VI	90 degree coupler (interior face) for Invisible Slot extrusion with SLOTLENS
PE-INVSLOT-135VI	135 degree coupler (interior face) for Invisible Slot extrusion with SLOTLENS
PE-INVSLOT-135VE	135 degree coupler (exterior face) for Invisible Slot extrusion with SLOTLENS
PE-INVSLOT-135	135 degree coupler for Invisible Slot extrusion with SLOTLENS
PE-INVSLOT-135TR	135 degree "T" coupler (right angle) for Invisible Slot extrusion with SLOTLENS
PE-INVSLOT-135TL	135 degree "T" coupler (left angle) for Invisible Slot extrusion with SLOTLENS
PE-INVSLOT-135X	135 degree "X" coupler for Invisible Slot extrusion with SLOTLENS
PE-INVSLOT-90T	90 degree "T" coupler for Invisible Slot extrusion with SLOTLENS
PE-INVSLOT-90X	90 degree "X" coupler for Invisible Slot extrusion with SLOTLENS

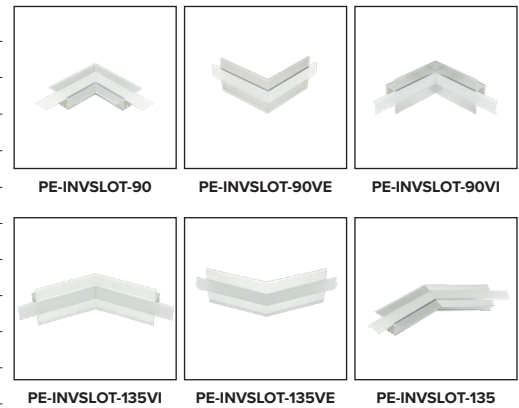

Couplers available as special order only
Please allow up to 2 weeks for order processing