

**LED**  
TECHNOLOGY

**50,000 Hours Life, 12.5Watt, 120VAC**

**Applications:**

5" & 6" Recessed Can Kit,  
Indoor And Wet Locations Use





**Features:**

- Adjustable CCT 2700K, 4000K and 5000K
- Replace Incandescent Save 80% Energy (100 Watt Equivalent)
- Instant Bright, High Power LED Bulb
- Smooth Dimming to 10% or Below
- Dims on Most Standard Household Dimmers
- Fits Standard 5 & 6 Inch Recess Cans
- Comes with Standard Quick Connect Plug
- Flicker Free, Tested for No Buzzing
- High Efficacy 90CRI True Color
- UL for Wet Location Application



**Specification:**

Input Line Voltage:	120VAC
Input Power	12.5W
Input Line Frequency	60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-20°C/-4°F
Maximum Operating Temp	40°C/104°F
Adjustable CCT	2700K/4000K/5000K
CRI	≥90
Lumens	1000
Beam Angle	100°
CBCP	440
Dimmable	Standard Triac Dimmer

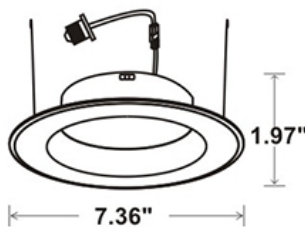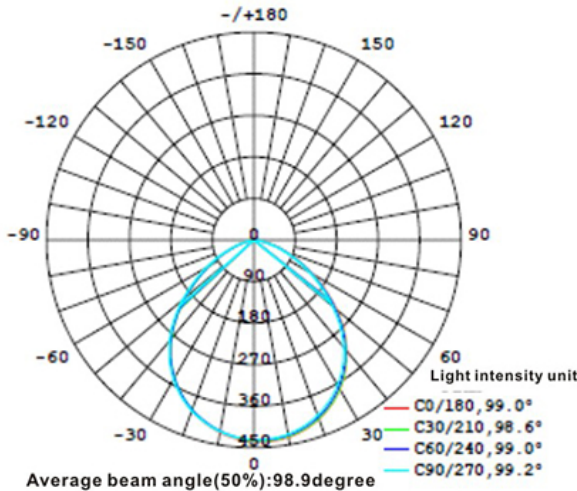

Height	E Avg/E Max	Beam Angle 90° Deg	Diameter
1m	203.5, 437.31x		200.00cm
2m	50.86, 109.31x		400.00cm
3m	22.61, 48.591x		600.00cm
4m	12.72, 27.331x		800.00cm
5m	8.138, 17.491x		1000.00cm
6m	5.652, 12.151x		1200.00cm
7m	4.152, 8.9251x		1400.00cm
8m	3.179, 6.8331x		1600.00cm
9m	2.512, 5.3991x		1800.00cm
10m	2.035, 4.3731x		2000.00cm

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

**WARRANTY**  
**2-YEAR\***

Model:#	Description	wattage	lumens	Socket
LC12RT6-S/CCT	6 Inch Dimmable, Smooth Retrofit Can Kit 3CCT	12.5W	1000	E26
LC12RT6-S/CCT/4PK	6 Inch Dimmable, Smooth Retrofit Can Kit 3CCT, 4-Pack	12.5W	1000	E26

\* 2 Year Limited Warranty    Wet Locations Rated    This Luminaire is JA8-2019 Compliant    LC12RT6-S/CCT    UPC: 806802-15612-5  
LC12RT6-S/CCT/4PK    UPC: 806802-15614-9

