

## In-Wall Rated Wire


(item #DI-0825-S) 16/2 AWG by the 250' spool    (item #DI-0824-S) 18/2 AWG by the 250' spool  
(item #DI-0825-F) 16/2 AWG by the foot        (item #DI-0824-F) 18/2 AWG by the foot

Hiding wire can be difficult when installing low-voltage lighting. For a low profile installation, you may choose to hide the wires behind a wall. The In-Wall Rated Wire is the best option for this low-voltage lighting configuration and is perfect for large or small remodels and upgrades. This Class 2 wire conforms to national electrical safety standards for in-wall lighting installation and is available in 16AWG and 18AWG (American Wire Gauge).

**Note:** Not for use in Wet Locations.

**Conduit:** High Purity, Oxygen-free Copper  
**Gauge:** 16AWG/ 18AWG  
**Conductor Count:** 2  
**Outer Diameter:** 6.2mm (16AWG) , 5.2mm (18AWG)  
**Twist Type:** Multi-twist, rope lay

**Outer Jacket Color:** White  
**Polarity Markers:** Red & Black  
**Rip Cord:** Nylon thread  
**Spark Test:** 3.0KV/ Sec NOBREAKING  
**Cold Bend Test:** - 10±1°C/4HR NO CRACKING  
**Heat Shock Test:** 121±1°C/1HR NO CRACKING

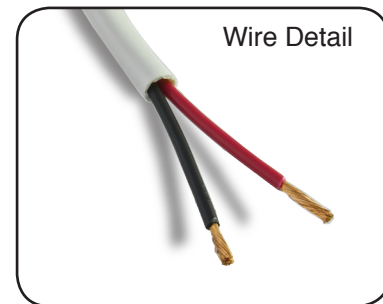

**Conforms to the following standards:**

NEC 725  
Article 800

UL listed  
CL2 rated

