



GREENCREATIVE



**CATALOG**



GREENCREATIVE

### Your partner for professional lighting solutions

GREEN CREATIVE, founded in 2010, is a solid-state lighting development and manufacturing company based in Sanford, FL with an office in Shanghai. The company offers a comprehensive line of high-performance LED Lamp, Downlight and Track lighting solutions, widely adopted by some of the largest companies in the world.



### Bringing you the latest in LED technology

Anchored by strong integrated R&D capabilities and patented technology, Our innovation, performance and reliability have been recognized year after year by the Illuminating Engineering Society Progress Report, the LEDs Magazine Sapphire Awards, Edison Report, NAILD and more.

### A complete line with national & international distribution

GREEN CREATIVE's full product line of ENERGY STAR®, DLC®, TITLE 20 & JA8 certified indoor retrofit and new construction lighting solutions serves the Retail, Hospitality, Food & Beverage, Office, Education & Industrial sectors through multiple distribution centers and sales networks across the USA.



# TABLE OF CONTENTS

## HALOGEN REPLACEMENTS

P1-9



PAR  
P1-4



PAR56  
P5-6



MR  
P7-9

## FLUORESCENT REPLACEMENTS

P10-35



TLED / EM DRIVER  
P10-24



PLL / PL / PLS / PLO  
P25-35

## HID REPLACEMENTS

P36-38



BOLLARD / POST TOP  
P36-37



HIGHBAY / LOWBAY  
P38

## INCANDESCENT REPLACEMENTS

P39-45



BR  
P39-40



A TYPE  
P41-42



FILAMENT  
P43-44



DECO  
P45

# 2021 FEATURED PRODUCTS




**NEW!**

P7-8

### REFINE MR16 & TRUE BEAM Accessories

- Proprietary REFINE lens delivers powerful light with intense CBCP and even light distribution
- Powered by TRUE CHROMA for best in class color rendering and color consistency
- Designed to work with TRUE BEAM accessories enabling precisely lighting design

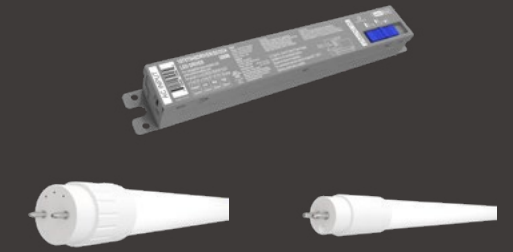

**NEW!**

T8

T5

P22-24

### SelectDrive Type C Linear Retrofit Lamps

- SelectDrive technology allows three field selectable lumen outputs
- Flicker Free 0-10V Dim-To-Off performance (using compatible dimmers)
- Parallel output driver requires no minimum lamp load to operate properly




**NEW!**

P36

### Compact HID Replacement Bulbs

- SelectDrive technology allows three field selectable lumen outputs for unparalleled adaptability
- Thermal protection against overheating ensuring longer lifetime
- Compact design ideal for easy installation for all application needs

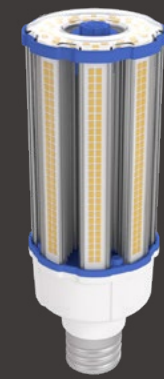

**NEW!**

P37

### HID Post Top Lamp

- 175W/250W/400W HID replacements
- Integrated rotary dimmer control
- Integral 6kV surge protector
- Thermal protection against overheating





### Superior Light

- Powered by TRUE CHROMA
- Excellent color rendering
- High color fidelity Rf 93
- High CRI 95

### Fresnel Technology


- Features Fresnel design to refine beam pattern
- Provides even light throughout the distribution with a crisp edge

### Focus TIR Lens

- Maximizes delivered center beam candle power
- Increases system efficiency

### Faceted Texture

- Minimizes glare
- Maximizes visual comfort

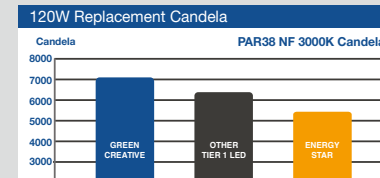

- New TRUE CHROMA standard achieves supreme color accuracy
- Proprietary optical system provides balanced distribution
- Intense center beam candle power with minimal glare
- Wide offering of CCTs, beam angles, and wattages

### SPECIFICATIONS

Product	Model	CCT	Lumens	CRI (typ.)	LPW	CBCP	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	TRUE CHROMA	ES / JA8 / T20
34890	6.5PAR20DIM/927SP15	2700K	520	95	80	5,000	Yes	50W	15°	50,000	120V	Yes	✓	✓/✓/✓
34891	6.5PAR20DIM/927NF25	2700K	560	95	86	1,800	Yes	50W	25°	50,000	120V	Yes	✓	✓/✓/✓
34892	6.5PAR20DIM/927FL40	2700K	560	95	86	1,100	Yes	50W	40°	50,000	120V	Yes	✓	✓/✓/✓
34893	6.5PAR20DIM/930SP15	3000K	550	95	85	5,300	Yes	50W	15°	50,000	120V	Yes	✓	✓/✓/✓
34894	6.5PAR20DIM/930NF25	3000K	580	95	89	1,900	Yes	50W	25°	50,000	120V	Yes	✓	✓/✓/✓
34895	6.5PAR20DIM/930FL40	3000K	580	95	89	1,200	Yes	50W	40°	50,000	120V	Yes	✓	✓/✓/✓
34896	6.5PAR20DIM/940FL40	4000K	600	95	92	1,300	Yes	50W	40°	50,000	120V	Yes	No	✓/✓/✓
34897	6.5PAR20DIM/930FL40/B •	3000K	580	95	89	1,200	Yes	50W	40°	50,000	120V	Yes	✓	✓/✓/✓
34898	11PAR30DIM/927SP15	2700K	950	95	86	10,000	Yes	75W	15°	50,000	120V	Yes	✓	✓/✓/✓
34899	11PAR30DIM/927NF25	2700K	950	95	86	4,500	Yes	75W	25°	50,000	120V	Yes	✓	✓/✓/✓
34900	11PAR30DIM/927FL40	2700K	950	95	86	1,700	Yes	75W	40°	50,000	120V	Yes	✓	✓/✓/✓
34901	11PAR30DIM/930SP15	3000K	990	95	90	10,600	Yes	75W	15°	50,000	120V	Yes	✓	✓/✓/✓
34902	11PAR30DIM/930NF25	3000K	990	95	90	4,700	Yes	75W	25°	50,000	120V	Yes	✓	✓/✓/✓
34903	11PAR30DIM/930FL40	3000K	990	95	90	1,750	Yes	75W	40°	50,000	120V	Yes	✓	✓/✓/✓
34904	11PAR30DIM/940FL40	4000K	1,030	95	94	1,850	Yes	75W	40°	50,000	120V	Yes	No	✓/✓/✓
34905	11PAR30DIM/930FL40/B •	3000K	990	95	90	1,750	Yes	75W	40°	50,000	120V	Yes	✓	✓/✓/✓
34906	11PAR30SNDIM/927SP15	2700K	950	95	86	10,000	Yes	75W	15°	50,000	120V	Yes	✓	✓/✓/✓
34907	11PAR30SNDIM/927NF25	2700K	950	95	86	4,500	Yes	75W	25°	50,000	120V	Yes	✓	✓/✓/✓
34908	11PAR30SNDIM/927FL40	2700K	950	95	86	1,700	Yes	75W	40°	50,000	120V	Yes	✓	✓/✓/✓
34909	11PAR30SNDIM/930SP15	3000K	990	95	90	10,600	Yes	75W	15°	50,000	120V	Yes	✓	✓/✓/✓
34910	11PAR30SNDIM/930NF25	3000K	990	95	90	4,700	Yes	75W	25°	50,000	120V	Yes	✓	✓/✓/✓

• Black finish

### SPECIFICATIONS

Product	Model	CCT	Lumens	CRI (typ.)	LPW	CBCP	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	TRUE CHROMA	ES / JA8 / T20
35939	11PAR30SNDIM/930NF25/B •	3000K	990	95	90	4,700	Yes	75W	25°	50,000	120V	Yes	✓	✓/✓/✓
34911	11PAR30SNDIM/930FL40	3000K	990	95	90	1,750	Yes	75W	40°	50,000	120V	Yes	✓	✓/✓/✓
34912	11PAR30SNDIM/940FL40	4000K	1,030	95	94	1,850	Yes	75W	40°	50,000	120V	Yes	No	✓/✓/✓
34913	11PAR30SNDIM/930FL40/B •	3000K	990	95	90	1,750	Yes	75W	40°	50,000	120V	Yes	✓	✓/✓/✓
34916	15.5PAR38DIM/927SP15	2700K	1,320	95	85	14,000	Yes	120W	15°	50,000	120V	Yes	✓	✓/✓/✓
34917	15.5PAR38DIM/927NF25	2700K	1,320	95	85	6,750	Yes	120W	25°	50,000	120V	Yes	✓	✓/✓/✓
34918	15.5PAR38DIM/927FL40	2700K	1,320	95	85	2,800	Yes	120W	40°	50,000	120V	Yes	✓	✓/✓/✓
34919	15.5PAR38DIM/930SP15	3000K	1,370	95	88	14,700	Yes	120W	15°	50,000	120V	Yes	✓	✓/✓/✓
34920	15.5PAR38DIM/930NF25	3000K	1,370	95	88	7,000	Yes	120W	25°	50,000	120V	Yes	✓	✓/✓/✓
34921	15.5PAR38DIM/930FL40	3000K	1,370	95	88	2,900	Yes	120W	40°	50,000	120V	Yes	✓	✓/✓/✓
34922	15.5PAR38DIM/940FL40	4000K	1,420	95	92	3,000	Yes	120W	40°	50,000	120V	Yes	No	✓/✓/✓
34923	15.5PAR38DIM/930NF25/B •	3000K	1,370	95	88	7,000	Yes	120W	25°	50,000	120V	Yes	✓	✓/✓/✓
34924	15.5PAR38DIM/930FL40/B •	3000K	1,370	95	88	2,900	Yes	120W	40°	50,000	120V	Yes	✓	✓/✓/✓
34925	15.5PAR38DIM/930FL40/GU24	3000K	1,370	95	88	2,900	Yes	120W	40°	50,000	120V	Yes	✓	✓/✓/✓
34914	11PAR30/930FL40/277V	3000K	990	95	90	1,750	No	75W	40°	50,000	120-277V	Yes	✓	✓/ N.A. / ✓
34915	11PAR30/940FL40/277V	4000K	1,030	95	94	1,850	No	75W	40°	50,000	120-277V	Yes	No	✓/ N.A. / ✓
34926	15.5PAR38/930FL40/277V	3000K	1,370	95	88	2,900	No	120W	40°	50,000	120-277V	Yes	✓	✓/ N.A. / ✓
34927	15.5PAR38/940FL40/277V	4000K	1,420	95	92	3,000	No	120W	40°	50,000	120-277V	Yes	No	✓/ N.A. / ✓

• Black finish

# PAR VALUE SELECT LINE

# PAR HO LINE



- Suitable to replace 50W, 75W, 120W halogen
- Dimmable with forward and reverse phase controls
- Compact size 1:1 halogen form factor
- Suitable for use in wet locations

- Very high output lamps are suitable to replace 75W/250W halogen and 39W/70W CMH
- Exceptional color rendering CRI 92
- Richer reds and natural skin tones
- Direct line voltage 120-277V - Dimmable options available also

SPECIFICATIONS													
Product	Model	CCT	Lumens	CRI (typ.)	LPW	CBCP	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	ES
34933	5.5PAR20DIM/830NF25/N	3000K	525	82	95	1,180	Yes	50W	25°	25,000	120V	No	✓
34934	5.5PAR20DIM/830FL40/N	3000K	525	82	95	595	Yes	50W	40°	25,000	120V	No	✓
34935	5.5PAR20DIM/840NF25/N	4000K	525	82	95	1,180	Yes	50W	25°	25,000	120V	No	✓
34936	5.5PAR20DIM/840FL40/N	4000K	525	82	95	595	Yes	50W	40°	25,000	120V	No	✓
34937	10PAR30DIM/830NF25/N	3000K	950	82	95	2,910	Yes	75W	25°	25,000	120V	No	✓
34938	10PAR30DIM/830FL40/N	3000K	950	82	95	1,315	Yes	75W	40°	25,000	120V	No	✓
34939	10PAR30DIM/840NF25/N	4000K	950	82	95	2,910	Yes	75W	25°	25,000	120V	No	✓
34940	10PAR30DIM/840FL40/N	4000K	950	82	95	1,315	Yes	75W	40°	25,000	120V	No	✓
34941	10PAR30SNDIM/830NF25/N	3000K	950	82	95	2,910	Yes	75W	25°	25,000	120V	No	✓
34942	10PAR30SNDIM/830FL40/N	3000K	950	82	95	1,315	Yes	75W	40°	25,000	120V	No	✓
34943	10PAR30SNDIM/840NF25/N	4000K	950	82	95	2,910	Yes	75W	25°	25,000	120V	No	✓
34944	10PAR30SNDIM/840FL40/N	4000K	950	82	95	1,315	Yes	75W	40°	25,000	120V	No	✓
34945	13.5PAR38DIM/830NF25/N	3000K	1,280	82	95	5,385	Yes	120W	25°	25,000	120V	No	✓
34946	12PAR38DIM/830FL40/N	3000K	1,150	82	95	2,235	Yes	120W	40°	25,000	120V	No	✓
34947	13.5PAR38DIM/840NF25/N	4000K	1,280	82	95	5,385	Yes	120W	25°	25,000	120V	No	✓
34948	12PAR38DIM/840FL40/N	4000K	1,150	82	95	2,235	Yes	120W	40°	25,000	120V	No	✓

SPECIFICATIONS														
Product	Model	CCT	Lumens	CRI (typ.)	LPW	CBCP	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	ES / JA8 / T20	
98206	19.5PAR30HO/930NF25/277V/R	3000K	1,800	92	92	8,160	No	75W	25°	50,000	120-277V	No	✓ / N.A. / ✓	
98207	19.5PAR30HO/930FL40/277V/R	3000K	1,800	92	92	3,400	No	75W	40°	50,000	120-277V	No	✓ / N.A. / ✓	
35429	19.5PAR30HO/935NF25/277V/R	3500K	1,800	92	92	8,160	No	75W	25°	50,000	120-277V	No	✓ / N.A. / ✓	
35430	19.5PAR30HO/935FL40/277V/R	3500K	1,800	92	92	3,400	No	75W	40°	50,000	120-277V	No	✓ / N.A. / ✓	
98208	19.5PAR30HO/940NF25/277V/R	4000K	1,800	92	92	8,160	No	75W	25°	50,000	120-277V	No	✓ / N.A. / ✓	
98209	19.5PAR30HO/940FL40/277V/R	4000K	1,800	92	92	3,400	No	75W	40°	50,000	120-277V	No	✓ / N.A. / ✓	
98223	25PAR38HO/927NF25/277V	2700K	2,400	92	96	10,000	No	250W	25°	50,000	120-277V	No	✓ / N.A. / ✓	
98210	25PAR38HO/930NF25/277V	3000K	2,500	92	100	10,000	No	250W	25°	50,000	120-277V	No	✓ / N.A. / ✓	
98211	25PAR38HO/930FL40/277V	3000K	2,500	92	100	4,800	No	250W	40°	50,000	120-277V	No	✓ / N.A. / ✓	
35431	25PAR38HO/935NF25/277V	3500K	2,500	92	100	10,000	No	250W	25°	50,000	120-277V	No	✓ / N.A. / ✓	
35432	25PAR38HO/935FL40/277V	3500K	2,500	92	100	4,800	No	250W	40°	50,000	120-277V	No	✓ / N.A. / ✓	
98212	25PAR38HO/940NF25/277V	4000K	2,500	92	100	10,000	No	250W	25°	50,000	120-277V	No	✓ / N.A. / ✓	
98213	25PAR38HO/940FL40/277V	4000K	2,500	92	100	4,800	No	250W	40°	50,000	120-277V	No	✓ / N.A. / ✓	
35526	30PAR38HODIM/927NF25/277V	2700K	2,700	92	90	11,000	Yes	250W	25°	50,000	120-277V	No	✓ / ✓ / N.A.	
35527	30PAR38HODIM/927FL40/277V	2700K	2,700	92	90	4,550	Yes	250W	40°	50,000	120-277V	No	✓ / ✓ / N.A.	
35528	30PAR38HODIM/930NF25/277V	3000K	2,800	92	93	11,760	Yes	250W	25°	50,000	120-277V	No	✓ / ✓ / N.A.	
35529	30PAR38HODIM/930FL40/277V	3000K	2,800	92	93	5,040	Yes	250W	40°	50,000	120-277V	No	✓ / ✓ / N.A.	
35530	30PAR38HODIM/935NF25/277V	3500K	2,900	92	97	11,800	Yes	250W	25°	50,000	120-277V	No	✓ / ✓ / N.A.	
35531	30PAR38HODIM/935FL40/277V	3500K	2,900	92	97	4,890	Yes	250W	40°	50,000	120-277V	No	✓ / ✓ / N.A.	
35532	30PAR38HODIM/940NF25/277V	4000K	3,000	92	100	12,200	Yes	250W	25°	50,000	120-277V	No	✓ / ✓ / N.A.	
35533	30PAR38HODIM/940FL40/277V	4000K	3,000	92	100	5,055	Yes	250W	40°	50,000	120-277V	No	✓ / ✓ / N.A.	





Dimmable with most forward and reverse phase controls

Flicker Free lighting effect

Spot/Narrow Flood/Flood beam angles


Multi-optic lens for even light distribution

Up to 34,700cd candela output and 4100lm light output

Enclosed fixtures rated

- Suitable to replace up to a 300W halogen with GX16d base
- Flicker free light (<5% flicker)
- Dimmable with most forward and reverse phase controls

GREEN CREATIVE PAR56 Provide Even Light Distribution

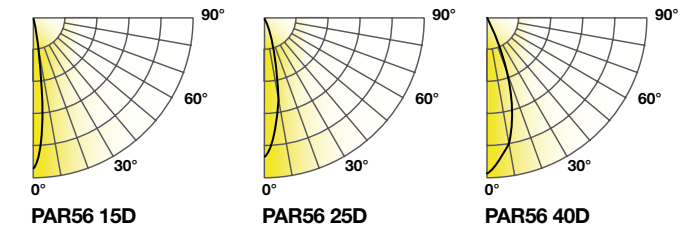


SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	CBCP	Dim*	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.
35416	40PAR56DIM/927SP15	2700K	3,800	92	95	33,300	Yes	300W	15°	50,000	120V	Yes
35417	40PAR56DIM/927NF25	2700K	3,800	92	95	14,700	Yes	300W	25°	50,000	120V	Yes
35418	40PAR56DIM/927FL40	2700K	3,800	92	95	7,100	Yes	300W	40°	50,000	120V	Yes
35419	40PAR56DIM/930SP15	3000K	4,000	92	100	34,000	Yes	300W	15°	50,000	120V	Yes
35420	40PAR56DIM/930NF25	3000K	4,000	92	100	15,000	Yes	300W	25°	50,000	120V	Yes
35421	40PAR56DIM/930FL40	3000K	4,000	92	100	7,200	Yes	300W	40°	50,000	120V	Yes





\* This lamp might not be compatible with all dimmers. Please visit [www.greencreative.com](http://www.greencreative.com) for compatibility information.






TRUE CHROMA delivers exceptional color rendering of  $R_f \geq 93$  using TM-30 99 color samples vs. CRI 8 color samples

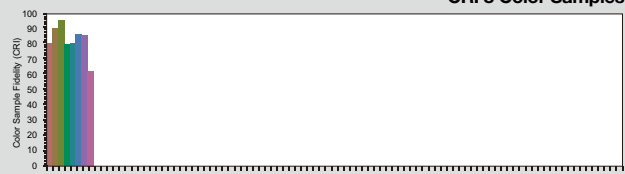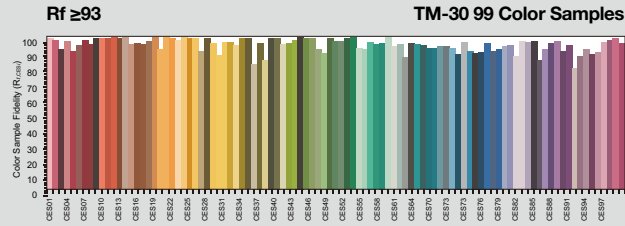

TRUE CHROMA guarantees best in class color consistency of  $SDCM \leq 3$ , tighter than typical industry standards



SDCM  $\leq 3$

- Powered by TRUE CHROMA (CRI  $\geq 95$ ,  $R_f \geq 93$ ,  $R_9 \geq 50$ ,  $SDCM \leq 3$ )
- Proprietary REFINE lens enables powerful light output without glare
- Industry leading five year warranty
- Smooth dimming with most forward and reverse phase dimming controls
- Designed to work with TRUE BEAM accessories

## SPECIFICATIONS


Product	Model	CCT	Lumens	CRI (typ.)	LPW	CBCP	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	TRUE CHROMA	ES / JA8 / T20
36114	7.5MR16DIM/927SP10/RC	2700K	530	95	71	7,000	Yes	42W	10°	25,000	12V	Yes	C	✓/✓/✓
36117	7MR16DIM/927SP15/RC	2700K	490	95	70	5,145	Yes	50W	15°	25,000	12V	Yes	C	✓/✓/✓
36118	7MR16DIM/927NF25/RC	2700K	490	95	70	2,800	Yes	50W	25°	25,000	12V	Yes	C	✓/✓/✓
36119	7MR16DIM/927FL35/RC	2700K	490	95	70	1,425	Yes	50W	35°	25,000	12V	Yes	C	✓/✓/✓
36115	7.5MR16DIM/930SP10/RC	3000K	540	95	72	7,200	Yes	42W	10°	25,000	12V	Yes	C	✓/✓/✓
36120	7MR16DIM/930SP15/RC	3000K	500	95	71	5,250	Yes	50W	15°	25,000	12V	Yes	C	✓/✓/✓
36121	7MR16DIM/930NF25/RC	3000K	500	95	71	2,900	Yes	50W	25°	25,000	12V	Yes	C	✓/✓/✓
36122	7MR16DIM/930FL35/RC	3000K	500	95	71	1,450	Yes	50W	35°	25,000	12V	Yes	C	✓/✓/✓
36116	7.5MR16DIM/940SP10/RC	4000K	550	95	73	7,400	Yes	42W	10°	25,000	12V	Yes	NO	✓/✓/✓
36123	7MR16DIM/940FL35/RC	4000K	510	95	73	1,480	Yes	50W	35°	25,000	12V	Yes	NO	✓/✓/✓
36124	7.5MR16DIM/927SP15/RC	2700K	530	95	71	5,570	Yes	75W	15°	25,000	12V	Yes	C	✓/✓/✓
36125	7.5MR16DIM/927NF25/RC	2700K	530	95	71	3,000	Yes	75W	25°	25,000	12V	Yes	C	✓/✓/✓
36126	7.5MR16DIM/927FL35/RC	2700K	530	95	71	1,540	Yes	75W	35°	25,000	12V	Yes	C	✓/✓/✓
36127	7.5MR16DIM/930SP15/RC	3000K	540	95	72	5,670	Yes	75W	15°	25,000	12V	Yes	C	✓/✓/✓
36128	7.5MR16DIM/930NF25/RC	3000K	540	95	72	3,100	Yes	75W	25°	25,000	12V	Yes	C	✓/✓/✓
36129	7.5MR16DIM/930FL35/RC	3000K	540	95	72	1,560	Yes	75W	35°	25,000	12V	Yes	C	✓/✓/✓
36130	7.5MR16DIM/940FL35/RC	4000K	550	95	73	1,595	Yes	75W	35°	25,000	12V	Yes	NO	✓/✓/✓
35767	7.5MR16DIM/927SP10/R	2700K	530	95	71	7,000	Yes	42W	10°	25,000	12V	Yes	C	✓/✓/✓
35550	7MR16DIM/927SP15/R	2700K	490	95	70	5,145	Yes	50W	15°	25,000	12V	Yes	C	✓/✓/✓
35551	7MR16DIM/927NF25/R	2700K	490	95	70	2,800	Yes	50W	25°	25,000	12V	Yes	C	✓/✓/✓
35552	7MR16DIM/927FL35/R	2700K	490	95	70	1,425	Yes	50W	35°	25,000	12V	Yes	C	✓/✓/✓
35768	7.5MR16DIM/930SP10/R	3000K	540	95	72	7,200	Yes	42W	10°	25,000	12V	Yes	C	✓/✓/✓
35553	7MR16DIM/930SP15/R	3000K	500	95	71	5,250	Yes	50W	15°	25,000	12V	Yes	C	✓/✓/✓
35555	7MR16DIM/930FL35/R	3000K	500	95	71	1,450	Yes	50W	35°	25,000	12V	Yes	C	✓/✓/✓
35769	7.5MR16DIM/940SP10/R	4000K	550	95	73	7,400	Yes	42W	10°	25,000	12V	Yes	NO	✓/✓/✓
35536	7.5MR16DIM/927SP15/R	2700K	530	95	71	5,570	Yes	75W	15°	25,000	12V	Yes	C	✓/✓/✓
35538	7.5MR16DIM/927FL35/R	2700K	530	95	71	1,540	Yes	75W	35°	25,000	12V	Yes	C	✓/✓/✓
35539	7.5MR16DIM/930SP15/R	3000K	540	95	72	5,670	Yes	75W	15°	25,000	12V	Yes	C	✓/✓/✓
35540	7.5MR16DIM/930NF25/R	3000K	540	95	72	3,100	Yes	75W	25°	25,000	12V	Yes	C	✓/✓/✓
35541	7.5MR16DIM/930FL35/R	3000K	540	95	72	1,560	Yes	75W	35°	25,000	12V	Yes	C	✓/✓/✓
35558	5GU10DIM/927NF25	2700K	380	95	76	1,900	Yes	50W	25°	25,000	120V	Yes	C	✓/✓/✓
35559	5GU10DIM/927FL35	2700K	380	95	76	1,105	Yes	50W	35°	25,000	120V	Yes	C	✓/✓/✓
35561	5GU10DIM/930NF25	3000K	390	95	78	1,950	Yes	50W	25°	25,000	120V	Yes	C	✓/✓/✓
35562	5GU10DIM/930FL35	3000K	390	95	78	1,135	Yes	50W	35°	25,000	120V	Yes	C	✓/✓/✓
35563	5GU10DIM/940FL35	4000K	400	95	80	1,160	Yes	50W	35°	25,000	120V	Yes	NO	✓/✓/✓

REFINE MR lamps are designed to work with GREEN CREATIVE's TRUE BEAM accessories which enable professionals to precisely realize any lighting design that can be imagined.




### LINEAR DISTRIBUTION LENS

Provides an elliptical linear shaped light distribution.




Product	Model	Lumen Transmissivity	CBCP of 10° Lamp	Field Angle Horiz. x Vert.
35815	MR/ACC/LN1225	80%	35%	12° x 25°
35816	MR/ACC/LN1236	80%	23%	12° x 36°
35817	MR/ACC/LN1260	80%	16%	12° x 60°

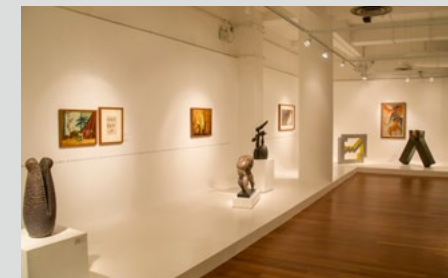

### WIDE DISTRIBUTION LENS

Maximizes wide distribution illumination for general lighting applications.




Product	Model	Lumen Transmissivity	CBCP of 10° Lamp	Field Angle
35820	MR/ACC/RD060	78%	6%	60°



### SQUARE LENS

Provides a square shaped light distribution.



Product	Model	Lumen Transmissivity	CBCP of 10° Lamp	Field Angle
35818	MR/ACC/SQ2525	80%	19%	25°
35819	MR/ACC/SQ3636	80%	11%	36°



### SHIFT LENS

Adjust the feel of any space by adding CCT lens options.



Product	Model	Lumen Transmissivity	CCT Shift Effect
35809	MR/ACC/CCT22	76%	2700K to 2200K
35810	MR/ACC/CCT24	82%	2700K to 2400K



### WALL WASH LENS

Bends the beam from 0° to 20° maximum deflection angle while maintaining uniform and consistent color and shape.



Product	Model	Lumen Transmissivity	CBCP of 10° Lamp	Max. Deflection
35821	MR/ACC/WW10D	80%	63%	10°
35822	MR/ACC/WW20D	80%	60%	20°



### HONEYCOMB LOUVER

Reduces glare and softens beam patterns.





Product	Model	Cutoff Angle	CBCP of 10° Lamp
35808	MR/ACC/HC	40°	66%




# MR16 VALUE SELECT LINE

# T8 DIR LINE

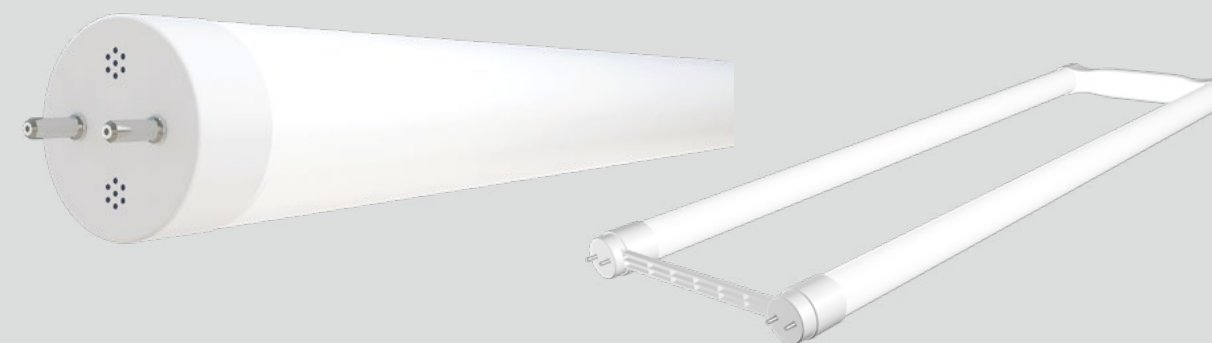

- Suitable to replace 20W, 35W, 50W, 60W halogen MR16 lamps
- Compatible with most low-voltage electronic transformers
- Smooth dimming with most forward and reverse phase dimming controls
- Suitable for use in totally enclosed fixtures

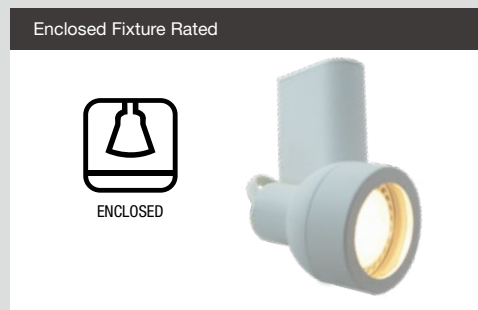

SPECIFICATIONS													
Product	Model	CCT	Lumens	CRI (typ.)	LPW	CBCP	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	ES / JA8 / T20
36200	6.5MR16DIM/827NF25/35W	2700K	460	82	71	1,610	Yes	35W	25°	25,000	12V	Yes	✓/N.A./N.A.
36201	6.5MR16DIM/830NF25/35W	3000K	460	82	71	1,610	Yes	35W	25°	25,000	12V	Yes	✓/N.A./N.A.
36202	6.5MR16DIM/827FL35/35W	2700K	460	82	71	910	Yes	35W	35°	25,000	12V	Yes	✓/N.A./N.A.
36203	6.5MR16DIM/830FL35/35W	3000K	460	82	71	910	Yes	35W	35°	25,000	12V	Yes	✓/N.A./N.A.
36204	6.5MR16DIM/927NF25	2700K	500	92	77	2,350	Yes	50W	25°	25,000	12V	Yes	✓/✓/✓
36205	6.5MR16DIM/930NF25	3000K	520	92	80	2,400	Yes	50W	25°	25,000	12V	Yes	✓/✓/✓
36206	6.5MR16DIM/940NF25	4000K	540	92	83	2,450	Yes	50W	25°	25,000	12V	Yes	✓/✓/✓
36207	6.5MR16DIM/927FL35	2700K	500	92	77	1,350	Yes	50W	35°	25,000	12V	Yes	✓/✓/✓
36208	6.5MR16DIM/930FL35	3000K	520	92	80	1,400	Yes	50W	35°	25,000	12V	Yes	✓/✓/✓
36209	6.5MR16DIM/940FL35	4000K	540	92	83	1,450	Yes	50W	35°	25,000	12V	Yes	✓/✓/✓
36210	6GU10DIM/827FL40	2700K	550	82	92	700	Yes	50W	40°	25,000	120V	Yes	✓/N.A./N.A.
36211	6GU10DIM/830FL40	3000K	570	82	95	750	Yes	50W	40°	25,000	120V	Yes	✓/N.A./N.A.
36212	6PAR16DIM/827FL35/RC	2700K	550	82	92	1,000	Yes	60W	35°	25,000	120V	Yes	✓/N.A./N.A.
36213	6PAR16DIM/830FL35/RC	3000K	570	82	95	1,050	Yes	60W	35°	25,000	120V	Yes	✓/N.A./N.A.
57984	6MR16DIM/827FL35/R	2700K	480	82	80	1,350	Yes	50W	35°	25,000	12V	Yes	✓/N.A./N.A.
57985	6MR16DIM/830FL35/R	3000K	500	82	83	1,400	Yes	50W	35°	25,000	12V	Yes	✓/N.A./N.A.
57986	6MR16DIM/840FL35/R	4000K	520	82	86	1,450	Yes	50W	35°	25,000	12V	Yes	✓/N.A./N.A.
57991	6PAR16DIM/830FL35/R	3000K	500	82	83	1,050	Yes	60W	35°	25,000	120V	Yes	✓/N.A./N.A.



- Plug & Play installation
- Instant Start & Programmed Start ballast compatible
- Compatible with select 0-10V dimmable ballasts and controls
- Meets NSF requirements (use of a shatter guard required)

SPECIFICATIONS													
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC	
36561	8T8/2F/830/DIR/RD	3000K	1,250	82	156	Yes	17W	220°	60,000	120-277V	Yes	✓	
36562	8T8/2F/835/DIR/RD	3500K	1,250	82	156	Yes	17W	220°	60,000	120-277V	Yes	✓	
36563	8T8/2F/840/DIR/RD	4000K	1,250	82	156	Yes	17W	220°	60,000	120-277V	Yes	✓	
36564	8T8/2F/850/DIR/RD	5000K	1,250	82	156	Yes	17W	220°	60,000	120-277V	Yes	✓	
36565	10T8/3F/830/DIR	3000K	1,450	82	145	Yes	25W	220°	60,000	120-277V	Yes	✓	
36566	10T8/3F/835/DIR	3500K	1,450	82	145	Yes	25W	220°	60,000	120-277V	Yes	✓	
36567	10T8/3F/840/DIR	4000K	1,450	82	145	Yes	25W	220°	60,000	120-277V	Yes	✓	
36712	10T8/3F/850/DIR	5000K	1,450	82	145	Yes	25W	220°	60,000	120-277V	Yes	✓	
36568	11T8/4F/830/DIR	3000K	1,800	82	164	Yes	32W	220°	60,000	120-277V	Yes	✓	
36569	11T8/4F/835/DIR	3500K	1,800	82	164	Yes	32W	220°	60,000	120-277V	Yes	✓	
36570	11T8/4F/840/DIR	4000K	1,800	82	164	Yes	32W	220°	60,000	120-277V	Yes	✓	
36571	11T8/4F/850/DIR	5000K	1,800	82	164	Yes	32W	220°	60,000	120-277V	Yes	✓	
36579	11T8/4F/830/DIR/C	3000K	1,800	82	164	Yes	32W	220°	60,000	120-277V	Yes	✓	
36580	11T8/4F/835/DIR/C	3500K	1,800	82	164	Yes	32W	220°	60,000	120-277V	Yes	✓	
36581	11T8/4F/840/DIR/C	4000K	1,800	82	164	Yes	32W	220°	60,000	120-277V	Yes	✓	
36582	11T8/4F/850/DIR/C	5000K	1,800	82	164	Yes	32W	220°	60,000	120-277V	Yes	✓	
36713	14T8/4F/830/DIR	3000K	2,200	82	157	Yes	32W	220°	60,000	120-277V	Yes	✓	
36572	14T8/4F/835/DIR	3500K	2,200	82	157	Yes	32W	220°	60,000	120-277V	Yes	✓	
36573	14T8/4F/840/DIR	4000K	2,200	82	157	Yes	32W	220°	60,000	120-277V	Yes	✓	
36574	14T8/4F/850/DIR	5000K	2,200	82	157	Yes	32W	220°	60,000	120-277V	Yes	✓	
36575	15T8U6/830/DIR	3000K	2,100	82	140	Yes	32W	220°	60,000	120-277V	Yes	✓	
36576	15T8U6/835/DIR	3500K	2,100	82	140	Yes	32W	220°	60,000	120-277V	Yes	✓	
36577	15T8U6/840/DIR	4000K	2,200	82	147	Yes	32W	220°	60,000	120-277V	Yes	✓	
36578	15T8U6/850/DIR	5000K	2,200	82	147	Yes	32W	220°	60,000	120-277V	Yes	✓	



# T8 DIR BAA LINE

# T5 DIR LINE

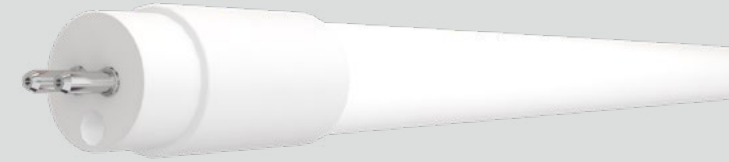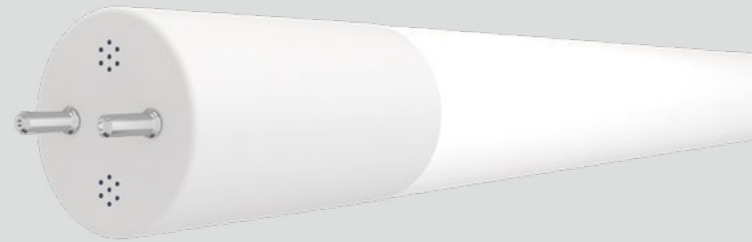


- Assembled in the USA - Satisfies BAA requirements
- Plug & Play installation working with Instant/Programmed Start ballast
- Compatible with select 0-10V dimmable ballasts and controls
- Meets NSF requirements (use of a shatter guard required)

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
36102	9.5T8/4F/830/DIR/US	3000K	1,650	82	143	Yes	32W	220°	60,000	120-277V	Yes	✓
36103	9.5T8/4F/835/DIR/US	3500K	1,650	82	143	Yes	32W	220°	60,000	120-277V	Yes	✓
36104	9.5T8/4F/840/DIR/US	4000K	1,650	82	143	Yes	32W	220°	60,000	120-277V	Yes	✓
36105	9.5T8/4F/850/DIR/US	5000K	1,650	82	143	Yes	32W	220°	60,000	120-277V	Yes	✓
36106	11T8/4F/830/DIR/US	3000K	1,800	82	138	Yes	32W	220°	60,000	120-277V	Yes	✓
36107	11T8/4F/835/DIR/US	3500K	1,800	82	138	Yes	32W	220°	60,000	120-277V	Yes	✓
36108	11T8/4F/840/DIR/US	4000K	1,800	82	138	Yes	32W	220°	60,000	120-277V	Yes	✓
36109	11T8/4F/850/DIR/US	5000K	1,800	82	138	Yes	32W	220°	60,000	120-277V	Yes	✓
36110	14T8/4F/830/DIR/US	3000K	2,200	82	138	Yes	32W	220°	60,000	120-277V	Yes	✓
36111	14T8/4F/835/DIR/US	3500K	2,200	82	138	Yes	32W	220°	60,000	120-277V	Yes	✓
36112	14T8/4F/840/DIR/US	4000K	2,200	82	138	Yes	32W	220°	60,000	120-277V	Yes	✓
36113	14T8/4F/850/DIR/US	5000K	2,200	82	138	Yes	32W	220°	60,000	120-277V	Yes	✓

- Plug & Play installation
- Instant Start & Programmed Start ballast compatible
- Plastic construction meets NSF requirements
- Compatible with select 0-10V dimmable ballasts and controls

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
57958	8T5HE/2F/830/DIR	3000K	950	82	119	Yes	14W	120°	60,000	120-277V	Yes	N.A.
57959	8T5HE/2F/835/DIR	3500K	950	82	119	Yes	14W	120°	60,000	120-277V	Yes	N.A.
57960	8T5HE/2F/840/DIR	4000K	1,100	82	138	Yes	14W	120°	60,000	120-277V	Yes	N.A.
35669	8T5HE/2F/850/DIR	5000K	1,100	82	138	Yes	14W	120°	60,000	120-277V	Yes	N.A.
57954	12T5HE/3F/830/DIR	3000K	1,420	82	118	Yes	21W	120°	60,000	120-277V	Yes	N.A.
57955	12T5HE/3F/835/DIR	3500K	1,420	82	118	Yes	21W	120°	60,000	120-277V	Yes	N.A.
57956	12T5HE/3F/840/DIR	4000K	1,550	82	125	Yes	21W	120°	60,000	120-277V	Yes	N.A.
97929	15T5HE/4F/830/DIR/R	3000K	2,200	82	147	Yes	28W	120°	60,000	120-277V	Yes	✓
97930	15T5HE/4F/835/DIR/R	3500K	2,200	82	147	Yes	28W	120°	60,000	120-277V	Yes	✓
97931	15T5HE/4F/840/DIR/R	4000K	2,250	82	150	Yes	28W	120°	60,000	120-277V	Yes	✓
97932	15T5HE/4F/850/DIR/R	5000K	2,250	82	150	Yes	28W	120°	60,000	120-277V	Yes	✓
98165	10.5T5HO/2F/830/DIR	3000K	1,500	82	143	Yes	24W	120°	60,000	120-277V	Yes	N.A.
98166	10.5T5HO/2F/835/DIR	3500K	1,500	82	143	Yes	24W	120°	60,000	120-277V	Yes	N.A.
98167	10.5T5HO/2F/840/DIR	4000K	1,600	82	152	Yes	24W	120°	60,000	120-277V	Yes	N.A.
35667	10.5T5HO/2F/850/DIR	5000K	1,600	82	152	Yes	24W	120°	60,000	120-277V	Yes	N.A.
98168	14.5T5HO/3F/830/DIR	3000K	2,050	82	142	Yes	39W	120°	60,000	120-277V	Yes	N.A.
98169	14.5T5HO/3F/835/DIR	3500K	2,050	82	142	Yes	39W	120°	60,000	120-277V	Yes	N.A.
98170	14.5T5HO/3F/840/DIR	4000K	2,200	82	152	Yes	39W	120°	60,000	120-277V	Yes	N.A.
97924	24T5HO/4F/830/DIR/R	3000K	3,450	82	144	Yes	54W	120°	60,000	120-277V	Yes	✓
97925	24T5HO/4F/835/DIR/R	3500K	3,450	82	144	Yes	54W	120°	60,000	120-277V	Yes	✓
97926	24T5HO/4F/840/DIR/R	4000K	3,500	82	146	Yes	54W	120°	60,000	120-277V	Yes	✓
97927	24T5HO/4F/850/DIR/R	5000K	3,500	82	146	Yes	54W	120°	60,000	120-277V	Yes	✓

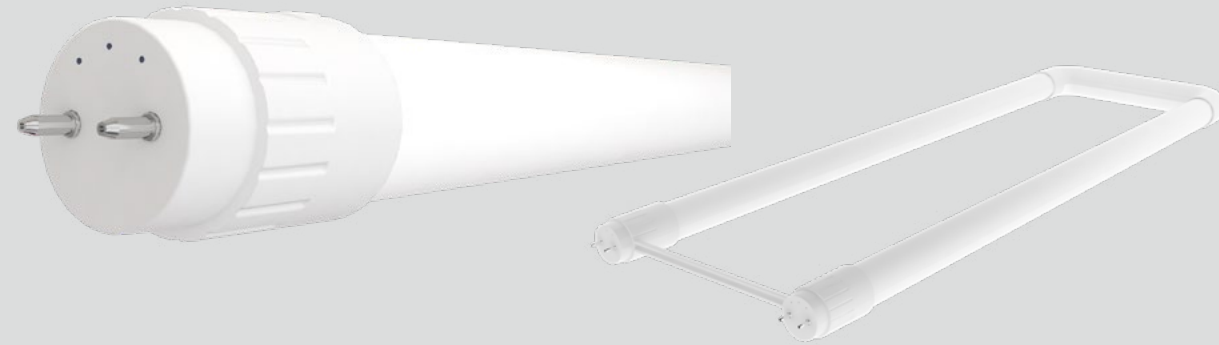

- Integral driver suitable for 120-277V
- Compatible with non-shunted lamp holders only
- Extra high efficacy (up to 167LPW) option available
- Meets NSF requirements (use of a shatter guard required)

- Integral driver suitable for 120V
- High efficacy up to 138 LPW
- Compatible with most forward and reverse phase dimmers

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
98379	10.5T8/4F/830/BYP	3000K	1,650	82	157	No	32W	160°	60,000	120-277V	Yes	✓
98380	10.5T8/4F/835/BYP	3500K	1,650	82	157	No	32W	160°	60,000	120-277V	Yes	✓
98381	10.5T8/4F/840/BYP	4000K	1,750	82	167	No	32W	160°	60,000	120-277V	Yes	✓
98382	10.5T8/4F/850/BYP	5000K	1,750	82	167	No	32W	160°	60,000	120-277V	Yes	✓
98476	14.5T8/4F/835/BYP	3500K	2,100	82	145	No	32W	160°	60,000	120-277V	Yes	✓
98473	14.5T8/4F/840/BYP	4000K	2,200	82	152	No	32W	160°	60,000	120-277V	Yes	✓
98474	14.5T8/4F/850/BYP	5000K	2,200	82	152	No	32W	160°	60,000	120-277V	Yes	✓
35677	20.5T8/4F/835/BYP	3500K	2,950	82	144	No	40W*	160°	60,000	120-277V	Yes	✓
34956	20.5T8/4F/840/BYP	4000K	3,000	82	146	No	40W*	160°	60,000	120-277V	Yes	✓
34957	20.5T8/4F/850/BYP	5000K	3,000	82	146	No	40W*	160°	60,000	120-277V	Yes	✓
98162	17T8U6/830/BYP/R	3000K	2,100	82	124	No	32W	160°	60,000	120-277V	Yes	✓
35460	17T8U6/835/BYP/R	3500K	2,100	82	124	No	32W	160°	60,000	120-277V	Yes	✓
98163	17T8U6/840/BYP/R	4000K	2,300	82	135	No	32W	160°	60,000	120-277V	Yes	✓
98164	17T8U6/850/BYP/R	5000K	2,300	82	135	No	32W	160°	60,000	120-277V	Yes	✓

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
98372	13T8/4F/DIM/830/BYP	3000K	1,700	82	128	Yes	32W	160°	50,000	120V	Yes	✓
98373	13T8/4F/DIM/835/BYP	3500K	1,700	82	128	Yes	32W	160°	50,000	120V	Yes	✓
98374	13T8/4F/DIM/840/BYP	4000K	1,800	82	138	Yes	32W	160°	50,000	120V	Yes	✓
98375	13T8/4F/DIM/850/BYP	5000K	1,800	82	138	Yes	32W	160°	50,000	120V	Yes	✓

\* Replace 40W T10/T12 lamps or 32W T8 lamps.



# T8 BYP VALUE SELECT LINE

# T5 BYP LINE



- Integral driver suitable for 120-277V
- Compatible with non-shunted lamp holders only
- Opaque glass body reduces glare and eliminates pixilation
- Meets NSF requirements (use of a shatter guard required)


- Integral driver suitable for 120-277V
- Wide beam design 270° light emitting area
- Suitable for use in totally enclosed fixtures
- Plastic construction meets NSF requirements

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
34882	8T8/2F/830/GL/BYP	3000K	1,000	82	125	No	17W	160°	60,000	120-277V	Yes	✓
34883	8T8/2F/835/GL/BYP	3500K	1,000	82	125	No	17W	160°	60,000	120-277V	Yes	✓
34884	8T8/2F/840/GL/BYP	4000K	1,050	82	131	No	17W	160°	60,000	120-277V	Yes	✓
35670	8T8/2F/850/GL/BYP	5000K	1,050	82	131	No	17W	160°	60,000	120-277V	Yes	✓
34886	12T8/3F/830/GL/BYP	3000K	1,500	82	125	No	25W	160°	60,000	120-277V	Yes	✓
34887	12T8/3F/835/GL/BYP	3500K	1,500	82	125	No	25W	160°	60,000	120-277V	Yes	✓
34888	12T8/3F/840/GL/BYP	4000K	1,550	82	129	No	25W	160°	60,000	120-277V	Yes	✓
34874	13T8/4F/830/GL/BYP	3000K	1,700	82	130	No	32W	160°	60,000	120-277V	Yes	✓
34875	13T8/4F/835/GL/BYP	3500K	1,700	82	130	No	32W	160°	60,000	120-277V	Yes	✓
34876	13T8/4F/840/GL/BYP	4000K	1,750	82	134	No	32W	160°	60,000	120-277V	Yes	✓
34877	13T8/4F/850/GL/BYP	5000K	1,750	82	134	No	32W	160°	60,000	120-277V	Yes	✓
35676	16T8/4F/835/GL/BYP	3500K	2,050	82	128	No	32W	160°	60,000	120-277V	Yes	✓
34880	16T8/4F/840/GL/BYP	4000K	2,050	82	128	No	32W	160°	60,000	120-277V	Yes	✓
34881	16T8/4F/850/GL/BYP	5000K	2,050	82	128	No	32W	160°	60,000	120-277V	Yes	✓

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
98287	9.5T5HE/2F/830/BYP	3000K	1,100	82	116	No	14W	120°	60,000	120-277V	Yes	N.A.
98288	9.5T5HE/2F/835/BYP	3500K	1,150	82	121	No	14W	120°	60,000	120-277V	Yes	N.A.
98289	9.5T5HE/2F/840/BYP	4000K	1,200	82	126	No	14W	120°	60,000	120-277V	Yes	N.A.
35665	9.5T5HE/2F/850/BYP	5000K	1,200	82	126	No	14W	120°	60,000	120-277V	Yes	N.A.
98290	12T5HE/3F/830/BYP	3000K	1,350	82	113	No	21W	120°	60,000	120-277V	Yes	N.A.
98291	12T5HE/3F/835/BYP	3500K	1,400	82	117	No	21W	120°	60,000	120-277V	Yes	N.A.
98292	12T5HE/3F/840/BYP	4000K	1,500	82	125	No	21W	120°	60,000	120-277V	Yes	N.A.
98293	14.5T5HE/4F/830/BYP	3000K	1,750	82	121	No	28W	120°	50,000	120-277V	Yes	✓
98294	14.5T5HE/4F/835/BYP	3500K	1,800	82	124	No	28W	120°	50,000	120-277V	Yes	✓
98295	14.5T5HE/4F/840/BYP	4000K	2,000	82	138	No	28W	120°	50,000	120-277V	Yes	✓

# T5 BYP LINE

# T8 DEB LINE

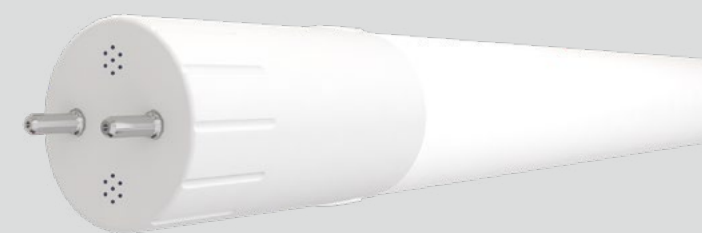

**Balanced Light Output**

**GREEN CREATIVE T5 BYPass**

**Other brand T5 BYPass**

**SAFETY SWITCH**

**SAFETY SWITCH**

- Double-ended bypass installation – Wired at both ends
- Utilizes existing lamp holders – Non-shunted or shunted
- Extra high efficacy series up to 170LPW available
- Meets NSF requirements (select models include film coating thus no need secondary shatter guard)



SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
98296	11.5T5HO/2F/830/BYP	3000K	1,350	82	117	No	24W	120°	60,000	120-277V	Yes	N.A.
98297	11.5T5HO/2F/835/BYP	3500K	1,400	82	122	No	24W	120°	60,000	120-277V	Yes	N.A.
98298	11.5T5HO/2F/840/BYP	4000K	1,500	82	130	No	24W	120°	60,000	120-277V	Yes	N.A.
35668	11.5T5HO/2F/850/BYP	5000K	1,500	82	130	No	24W	120°	60,000	120-277V	Yes	N.A.
98299	14.5T5HO/3F/830/BYP	3000K	1,800	82	124	No	39W	120°	50,000	120-277V	Yes	N.A.
98300	14.5T5HO/3F/835/BYP	3500K	1,850	82	128	No	39W	120°	50,000	120-277V	Yes	N.A.
98301	14.5T5HO/3F/840/BYP	4000K	1,900	82	131	No	39W	120°	50,000	120-277V	Yes	N.A.
98302	25T5HO/4F/830/BYP	3000K	3,200	82	128	No	54W	120°	50,000	120-277V	Yes	✓
98303	25T5HO/4F/835/BYP	3500K	3,200	82	128	No	54W	120°	50,000	120-277V	Yes	✓
98304	25T5HO/4F/840/BYP	4000K	3,200	82	128	No	54W	120°	50,000	120-277V	Yes	✓
98305	25T5HO/4F/850/BYP	5000K	3,200	82	128	No	54W	120°	50,000	120-277V	Yes	✓

SPECIFICATIONS													
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC / NSF	
97934	8.5T8/2F/830/DEB/RC	3000K	1,050	82	124	No	17W	160°	60,000	120-277V	Yes	✓/✓	
97935	8.5T8/2F/835/DEB/RC	3500K	1,050	82	124	No	17W	160°	60,000	120-277V	Yes	✓/✓	
97936	8.5T8/2F/840/DEB/RC	4000K	1,100	82	129	No	17W	160°	60,000	120-277V	Yes	✓/✓	
35663	8.5T8/2F/850/DEB/RC	5000K	1,100	82	129	No	17W	160°	60,000	120-277V	Yes	✓/✓	
35651	10T8/4F/830/DEB	3000K	1,650	82	165	No	32W	160°	60,000	120-277V	Yes	✓/✓	
35652	10T8/4F/835/DEB	3500K	1,650	82	165	No	32W	160°	60,000	120-277V	Yes	✓/✓	
35653	10T8/4F/840/DEB	4000K	1,700	82	170	No	32W	160°	60,000	120-277V	Yes	✓/✓	
35654	10T8/4F/850/DEB	5000K	1,700	82	170	No	32W	160°	60,000	120-277V	Yes	✓/✓	
35647	10T8/4F/830/DEB/C	3000K	1,650	82	165	No	32W	160°	60,000	120-277V	Yes	✓/✓	
35648	10T8/4F/835/DEB/C	3500K	1,650	82	165	No	32W	160°	60,000	120-277V	Yes	✓/✓	
35649	10T8/4F/840/DEB/C	4000K	1,700	82	170	No	32W	160°	60,000	120-277V	Yes	✓/✓	
35650	10T8/4F/850/DEB/C	5000K	1,700	82	170	No	32W	160°	60,000	120-277V	Yes	✓/✓	
98340	12T8/3F/830/DEB/R	3000K	1,400	82	117	No	25W	160°	60,000	120-277V	Yes	✓/✓	
98341	12T8/3F/835/DEB/R	3500K	1,400	82	117	No	25W	160°	60,000	120-277V	Yes	✓/✓	
98342	12T8/3F/840/DEB/R	4000K	1,450	82	121	No	25W	160°	60,000	120-277V	Yes	✓/✓	
35657	12T8/4F/830/DEB	3000K	1,700	82	142	No	32W	160°	60,000	120-277V	Yes	✓/✓	
35658	12T8/4F/835/DEB	3500K	1,700	82	142	No	32W	160°	60,000	120-277V	Yes	✓/✓	
35659	12T8/4F/840/DEB	4000K	1,800	82	150	No	32W	160°	60,000	120-277V	Yes	✓/✓	
35660	12T8/4F/850/DEB	5000K	1,800	82	150	No	32W	160°	60,000	120-277V	Yes	✓/✓	
35662	14T8/4F/835/DEB/R	3500K	2,100	82	150	No	32W	160°	60,000	120-277V	Yes	✓/✓	
35655	14T8/4F/840/DEB/R	4000K	2,200	82	157	No	32W	160°	60,000	120-277V	Yes	✓/✓	
35656	14T8/4F/850/DEB/R	5000K	2,200	82	157	No	32W	160°	60,000	120-277V	Yes	✓/✓	
35664	17T8/4F/835/DEB	3500K	2,100	82	124	No	32W	160°	60,000	120-277V	Yes	✓/✓	
98433	17T8/4F/840/DEB	4000K	2,200	82	129	No	32W	160°	60,000	120-277V	Yes	✓/✓	
98434	17T8/4F/850/DEB	5000K	2,200	82	129	No	32W	160°	60,000	120-277V	Yes	✓/✓	



# T8 DEB LINE - 8'


# T8 UE8 LINE

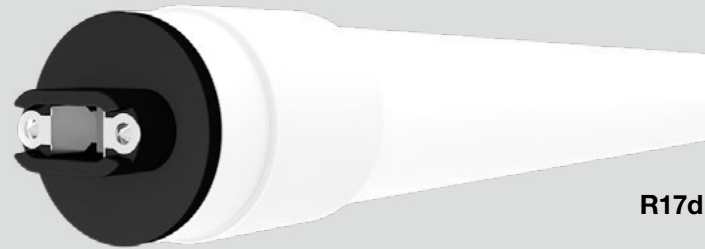

R17d




Fa8

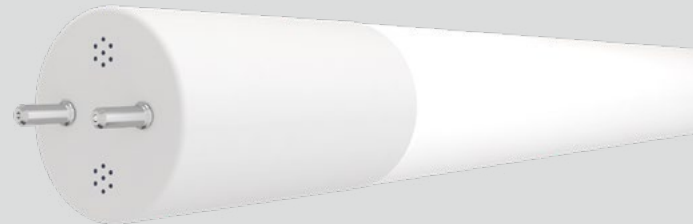

- Integral driver suitable for 120-277V
- Replaces 8ft F96T8/F96T12 fluorescent lamps
- Available in single pin & recessed double contact pin
- Double ended installation, no need to change existing sockets

- Assembled in the USA – Satisfies BAA requirements
- Single ended & Double ended installation (UEB)
- Replaces 4' T8 fluorescent lamp
- Integral driver suitable for 120-277V


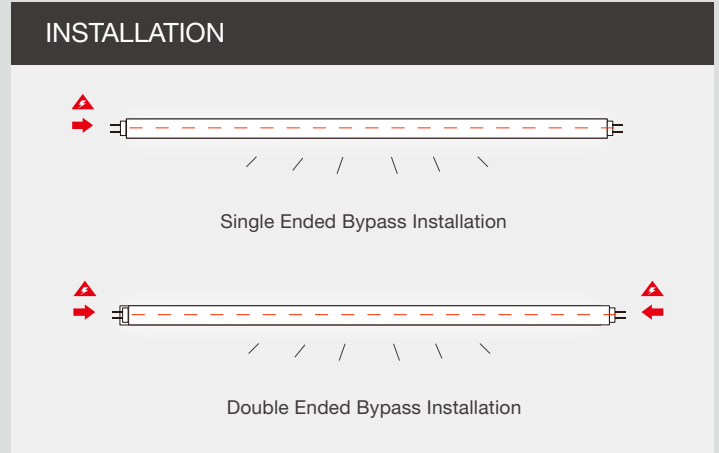


## SPECIFICATIONS

Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
34869	43T8/8F/840/DEB/Fa8	4000K	5,500	82	128	No	F96T8 F96T12	160°	50,000	120-277V	Yes	✓
34870	43T8/8F/850/DEB/Fa8	5000K	5,500	82	128	No	F96T8 F96T12	160°	50,000	120-277V	Yes	✓
34871	43T8/8F/840/DEB/R17d	4000K	5,500	82	128	No	F96T8 F96T12	160°	50,000	120-277V	Yes	N.A.
34872	43T8/8F/850/DEB/R17d	5000K	5,500	82	128	No	F96T8 F96T12	160°	50,000	120-277V	Yes	N.A.

## SPECIFICATIONS

Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
35772	10T8/4F/830/UEB/US	3000K	1,650	82	165	No	32W	160°	60,000	120-277V	Yes	✓
35773	10T8/4F/835/UEB/US	3500K	1,650	82	165	No	32W	160°	60,000	120-277V	Yes	✓
35770	10.5T8/4F/840/UEB/US	4000K	1,650	82	157	No	32W	160°	60,000	120-277V	Yes	✓
35774	10T8/4F/850/UEB/US	5000K	1,700	82	170	No	32W	160°	60,000	120-277V	Yes	✓
35775	12T8/4F/830/UEB/US	3000K	1,700	82	142	No	32W	160°	60,000	120-277V	Yes	✓
35776	12T8/4F/835/UEB/US	3500K	1,700	82	142	No	32W	160°	60,000	120-277V	Yes	✓
35771	14T8/4F/840/UEB/R/US	4000K	1,800	82	128	No	32W	160°	60,000	120-277V	Yes	✓
35777	12T8/4F/850/UEB/US	5000K	1,800	82	150	No	32W	160°	60,000	120-277V	Yes	✓
35778	14T8/4F/835/UEB/US	3500K	2,100	82	150	No	32W	160°	60,000	120-277V	Yes	✓
35779	14T8/4F/840/UEB/US	4000K	2,200	82	157	No	32W	160°	60,000	120-277V	Yes	✓
35780	14T8/4F/850/UEB/US	5000K	2,200	82	157	No	32W	160°	60,000	120-277V	Yes	✓
35781	17T8/4F/835/UEB/US	3500K	2,100	82	124	No	32W	160°	60,000	120-277V	Yes	✓
35782	17T8/4F/840/UEB/US	4000K	2,200	82	129	No	32W	160°	60,000	120-277V	Yes	✓
35783	17T8/4F/850/UEB/US	5000K	2,200	82	129	No	32W	160°	60,000	120-277V	Yes	✓

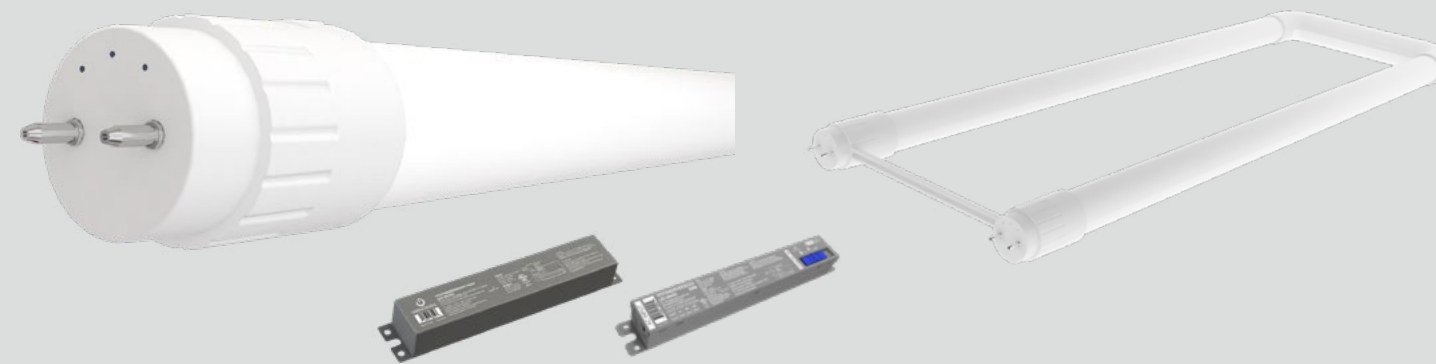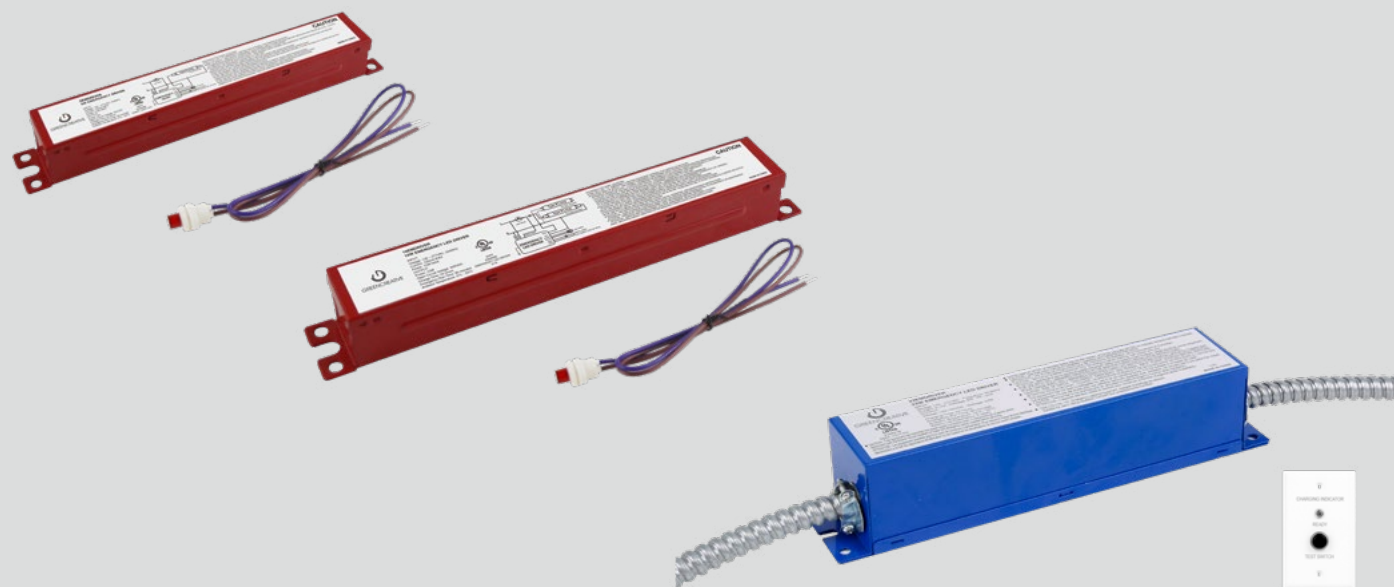

- Suitable for use with select GREEN CREATIVE products
- Dual voltage 120/277 VAC 60Hz input
- Constant power output in emergency mode for a minimum of 90 minutes
- Meets or exceeds all National Electrical Code and Life Safety Code Emergency Lighting Requirements

- Compatible with 0-10V controls
- Utilizes existing lamp holders – shunted or non-shunted
- Flicker Free (<5% flicker)
- Options of single voltage or SelectDrive external drivers


## SPECIFICATIONS

Product	Model	Input Voltage	Output Power	Charge Time.	Emergency Run Time	Battery	Application	T20
34958	5EMDRIVER	120-277V	5W	24 hours	90 minutes	Hi-temp rechargeable Lithium-Ion	Select GREEN CREATIVE T8 retrofit lamps in ceilings 11' or less	N.A.
34959	10EMDRIVER	120-277V	10W	24 hours	90 minutes	Hi-temp rechargeable Lithium-Ion	Select GREEN CREATIVE T8 retrofit lamps in ceilings 17' or less	✓
98003	23EMDRIVER	120-277V	23W	24 hours	90 minutes	Hi-temp rechargeable Lithium-Ion	Select GREEN CREATIVE fixtures and lamps	✓

## SPECIFICATIONS

Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
98325	9.5T8/2F/830/EXT	3000K	1,350	82	142	Yes	17W	160°	60,000	120-277V	Yes	✓
98326	9.5T8/2F/835/EXT	3500K	1,400	82	147	Yes	17W	160°	60,000	120-277V	Yes	✓
98327	9.5T8/2F/840/EXT	4000K	1,500	82	158	Yes	17W	160°	60,000	120-277V	Yes	✓
35671	9.5T8/2F/850/EXT	5000K	1,500	82	158	Yes	17W	160°	60,000	120-277V	Yes	✓
98328	10.5T8/3F/830/EXT	3000K	1,450	82	138	Yes	25W	160°	60,000	120-277V	Yes	✓
98329	10.5T8/3F/835/EXT	3500K	1,500	82	143	Yes	25W	160°	60,000	120-277V	Yes	✓
98330	10.5T8/3F/840/EXT	4000K	1,600	82	152	Yes	25W	160°	60,000	120-277V	Yes	✓
98331	11.5T8/4F/830/EXT	3000K	1,600	82	139	Yes	32W	160°	60,000	120-277V	Yes	✓
98332	11.5T8/4F/835/EXT	3500K	1,650	82	143	Yes	32W	160°	60,000	120-277V	Yes	✓
98333	11.5T8/4F/840/EXT	4000K	1,700	82	148	Yes	32W	160°	60,000	120-277V	Yes	✓
98334	11.5T8/4F/850/EXT	5000K	1,700	82	148	Yes	32W	160°	60,000	120-277V	Yes	✓
35675	14T8/4F/835/EXT	3500K	2,000	82	143	Yes	32W	160°	60,000	120-277V	Yes	✓
98335	14T8/4F/840/EXT	4000K	2,050	82	146	Yes	32W	160°	60,000	120-277V	Yes	✓
98336	14T8/4F/850/EXT	5000K	2,050	82	146	Yes	32W	160°	60,000	120-277V	Yes	✓
98337	14.5T8U6/830/EXT	3000K	2,000	82	138	Yes	32W	160°	60,000	120-277V	Yes	✓
35461	14.5T8U6/835/EXT	3500K	2,000	82	138	Yes	32W	160°	60,000	120-277V	Yes	✓
98338	14.5T8U6/840/EXT	4000K	2,200	82	152	Yes	32W	160°	60,000	120-277V	Yes	✓
98339	14.5T8U6/850/EXT	5000K	2,200	82	152	Yes	32W	160°	60,000	120-277V	Yes	✓
35896	15T8T5HEDRIVER/SD/2CH	15W / SelectDrive 120-277V with 0-10V Dimming External LED Driver for use with 1-2 T8/T5 HE Lamps										
35897	15T8T5HEDRIVER/SD/4CH	15W / SelectDrive 120-277V with 0-10V Dimming External LED Driver for use with 3-4 T8/T5 HE Lamps										
98259	15T8T5HEDRIVER/2CH/R	15W / 120-277V with 0-10V Dimming External LED Driver for use with 1-2 T8/T5 HE Lamps										
98260	15T8T5HEDRIVER/4CH/R	15W / 120-277V with 0-10V Dimming External LED Driver for use with 3-4 T8/T5 HE Lamps										
35797	FU10W/T5T8/EXT/EMDRIVER	10.7W EM Driver for use with EXT Type C TLED Systems										
35798	FU13W/T5T8/EXT/EMDRIVER	13.7W EM Driver for use with EXT Type C TLED Systems										
35799	FU17W/T5T8/EXT/EMDRIVER	17W EM Driver for use with EXT Type C TLED Systems										




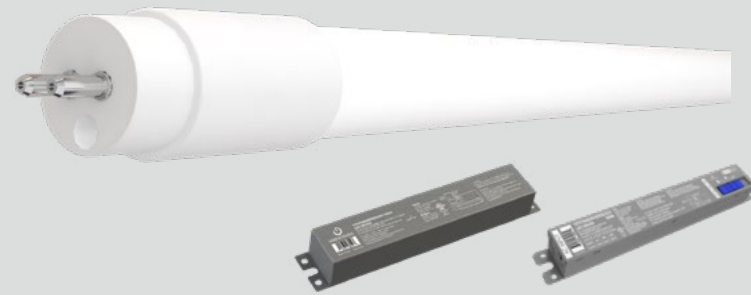

## Enjoy more flexibility and greater energy savings



Designed to replace 14W-32W fluorescent T8 and T5 lamps, our retrofit lamps offer remarkable performance and generate substantial ROI. Featured with SelectDrive technology, the system enables users to choose from three field-selectable lumen outputs with just a flip of switch. The GREEN CREATIVE Linear Retrofit Lamp is a cost-effective solution for most applications.

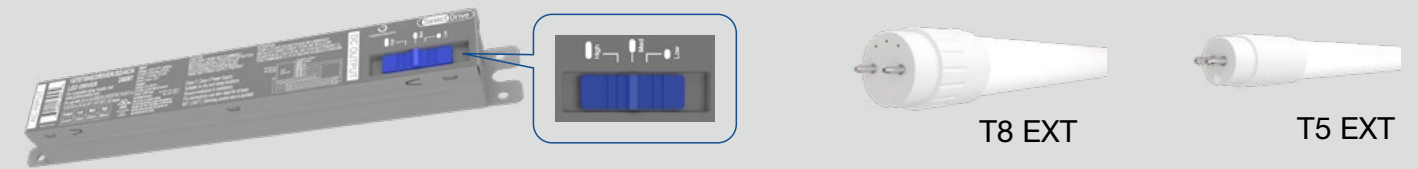

## SelectDrive Technology

Meet a variety of lighting needs with just one product. Choose from three lumen output levels simply by flipping the switch on the driver.




- Compatible with 0-10V controls
- Utilizes existing lamp holders – shunted or non-shunted
- Flicker Free (<5% flicker)
- Options of single voltage or SelectDrive external drivers

### SPECIFICATIONS

Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
98306	9.5T5HE/2F/830/EXT	3000K	1,350	82	142	Yes	14W	120°	60,000	120-277V	Yes	N.A.
98307	9.5T5HE/2F/835/EXT	3500K	1,400	82	147	Yes	14W	120°	60,000	120-277V	Yes	N.A.
98308	9.5T5HE/2F/840/EXT	4000K	1,500	82	158	Yes	14W	120°	60,000	120-277V	Yes	N.A.
35666	9.5T5HE/2F/850/EXT	5000K	1,500	82	158	Yes	14W	120°	60,000	120-277V	Yes	N.A.
98309	11T5HE/3F/830/EXT	3000K	1,500	82	136	Yes	21W	120°	60,000	120-277V	Yes	N.A.
98310	11T5HE/3F/835/EXT	3500K	1,550	82	141	Yes	21W	120°	60,000	120-277V	Yes	N.A.
98311	11T5HE/3F/840/EXT	4000K	1,650	82	150	Yes	21W	120°	60,000	120-277V	Yes	N.A.
98312	13.5T5HE/4F/830/EXT	3000K	1,800	82	133	Yes	28W	120°	60,000	120-277V	Yes	✓
98313	13.5T5HE/4F/835/EXT	3500K	1,850	82	137	Yes	28W	120°	60,000	120-277V	Yes	✓
98314	13.5T5HE/4F/840/EXT	4000K	2,000	82	148	Yes	28W	120°	60,000	120-277V	Yes	✓
98321	22T5HO/4F/830/EXT	3000K	3,200	82	145	Yes	54W	120°	50,000	120-277V	Yes	✓
98322	22T5HO/4F/835/EXT	3500K	3,200	82	145	Yes	54W	120°	50,000	120-277V	Yes	✓
98323	22T5HO/4F/840/EXT	4000K	3,400	82	155	Yes	54W	120°	50,000	120-277V	Yes	✓
98324	22T5HO/4F/850/EXT	5000K	3,400	82	155	Yes	54W	120°	50,000	120-277V	Yes	✓
35896	15T8T5HEDRIVER/SD/2CH	15W / SelectDrive 120-277V with 0-10V Dimming External LED Driver for use with 1-2 T8/T5 HE Lamps										
35897	15T8T5HEDRIVER/SD/4CH	15W / SelectDrive 120-277V with 0-10V Dimming External LED Driver for use with 3-4 T8/T5 HE Lamps										
98259	15T8T5HEDRIVER/2CH/R	15W / 120-277V with 0-10V Dimming External LED Driver for use with 1-2 T8/T5 HE Lamps										
98260	15T8T5HEDRIVER/4CH/R	15W / 120-277V with 0-10V Dimming External LED Driver for use with 3-4 T8/T5 HE Lamps										
98261	24T5HODRIVER/2CH/R	24W / 120-277V with 0-10V Dimming External LED Driver for use with 1-2 T5 HO Lamps										
98262	24T5HODRIVER/4CH/R	24W / 120-277V with 0-10V Dimming External LED Driver for use with 3-4 T5 HO Lamps										
35797	FU10W/T5T8/EXT/EMDRIVER	10.7W EM Driver for use with EXT Type C TLED Systems										
35798	FU13W/T5T8/EXT/EMDRIVER	13.7W EM Driver for use with EXT Type C TLED Systems										
35799	FU17W/T5T8/EXT/EMDRIVER	17W EM Driver for use with EXT Type C TLED Systems										


## Flicker Free Dim-To-Off

Our external drivers are compatible with a wide range of dimming systems at 0-10V, provide flicker free Dim-To-Off performance, and support energy compliance to most building codes.

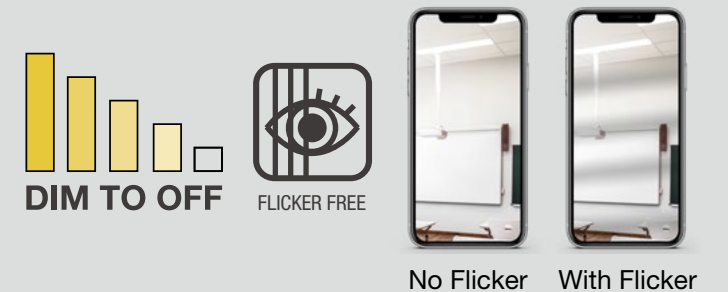

## No Minimum Load


Parallel outputs design require no minimum lamp load to operate properly. This eliminates the risk of lamp damage from overloads regardless of the number of lamps connected.


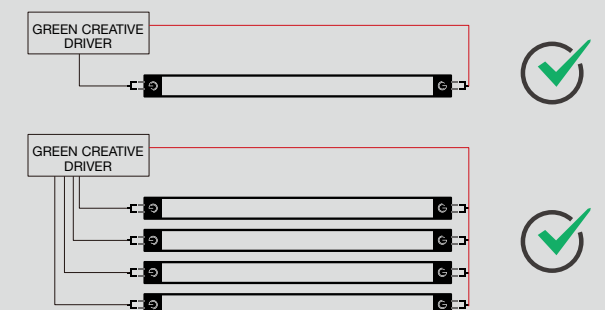


## Maximized Savings

Type C represent a significant savings vs fluorescent bulbs. Maximize your savings with a utility incentive\* and by adding controls to further reduce power consumption.

\*where applicable

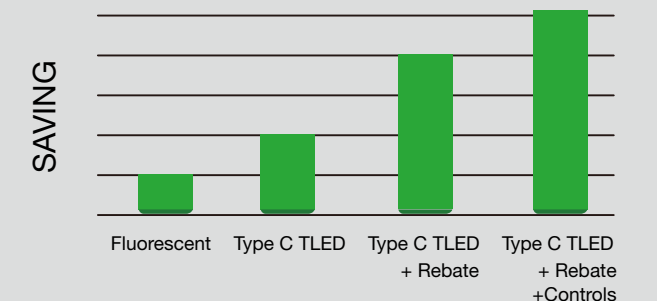

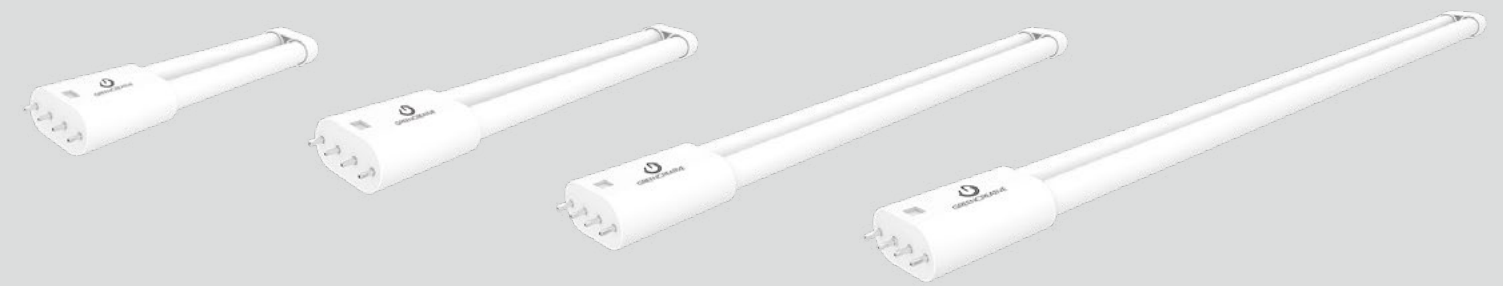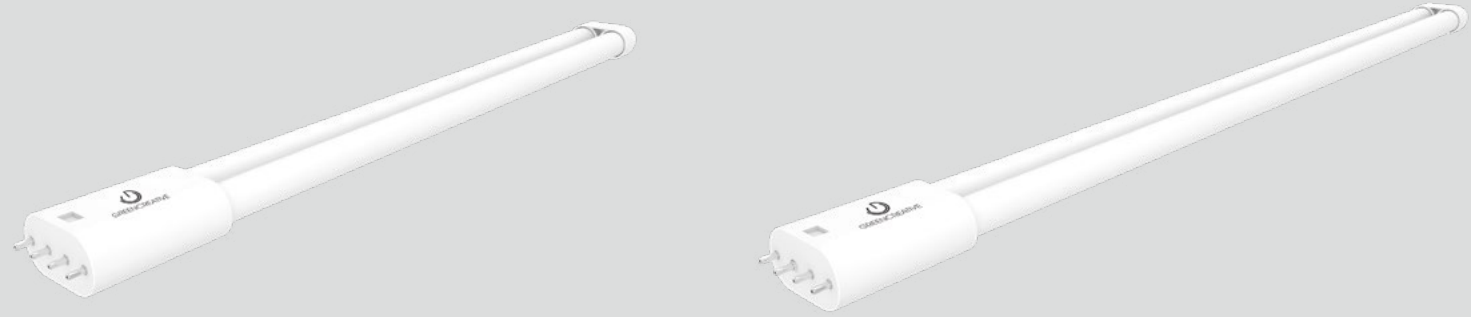

- Plug & Play installation
- Instant Start & Programmed Start ballast compatible
- Plastic film prevents glass from shattering
- Installs into 2G11 sockets
- 14.5W dimmable with select 0-10V ballasts and controls





- Integral driver suitable for 120-277V
- Replaces 18W / 24W / 36W / 40W 4-pin (2G11) CFL lamps
- High efficacy up to 138 LPW
- 16W / 17W models suitable for use in enclosed fixtures

### SPECIFICATIONS

Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
98477	13PLL/830/GL/DIR	3000K	2,050	82	158	No	40W	160°	50,000	120-277V	Yes	✓
98478	13PLL/835/GL/DIR	3500K	2,100	82	162	No	40W	160°	50,000	120-277V	Yes	✓
98479	13PLL/840/GL/DIR	4000K	2,100	82	162	No	40W	160°	50,000	120-277V	Yes	✓
98488	14.5PLL/835/GL/DIR	3500K	1,950	82	134	Yes	36W	160°	50,000	120-277V	Yes	N.A.
98489	14.5PLL/840/GL/DIR	4000K	2,000	82	138	Yes	36W	160°	50,000	120-277V	Yes	N.A.

### SPECIFICATIONS

Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
34858	8.5PLL/835/GL/BYP	3500K	950	82	112	No	18W	160°	50,000	120-277V	Yes	N.A.
34859	8.5PLL/840/GL/BYP	4000K	980	82	115	No	18W	160°	50,000	120-277V	Yes	N.A.
34861	10PLL/835/GL/BYP	3500K	1,200	82	120	No	24W	160°	50,000	120-277V	Yes	N.A.
34862	10PLL/840/GL/BYP	4000K	1,250	82	125	No	24W	160°	50,000	120-277V	Yes	N.A.
34864	16PLL/835/GL/BYP	3500K	1,950	82	122	No	36W	160°	50,000	120-277V	Yes	N.A.
34865	16PLL/840/GL/BYP	4000K	2,000	82	125	No	36W	160°	50,000	120-277V	Yes	N.A.
34866	17PLL/830/GL/BYP	3000K	2,050	82	121	No	40W	160°	50,000	120-277V	Yes	✓
34867	17PLL/835/GL/BYP	3500K	2,150	82	126	No	40W	160°	50,000	120-277V	Yes	✓
34868	17PLL/840/GL/BYP	4000K	2,200	82	129	No	40W	160°	50,000	120-277V	Yes	✓

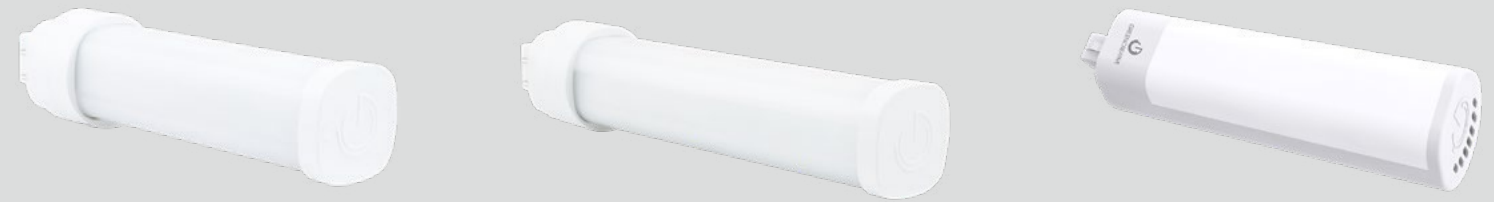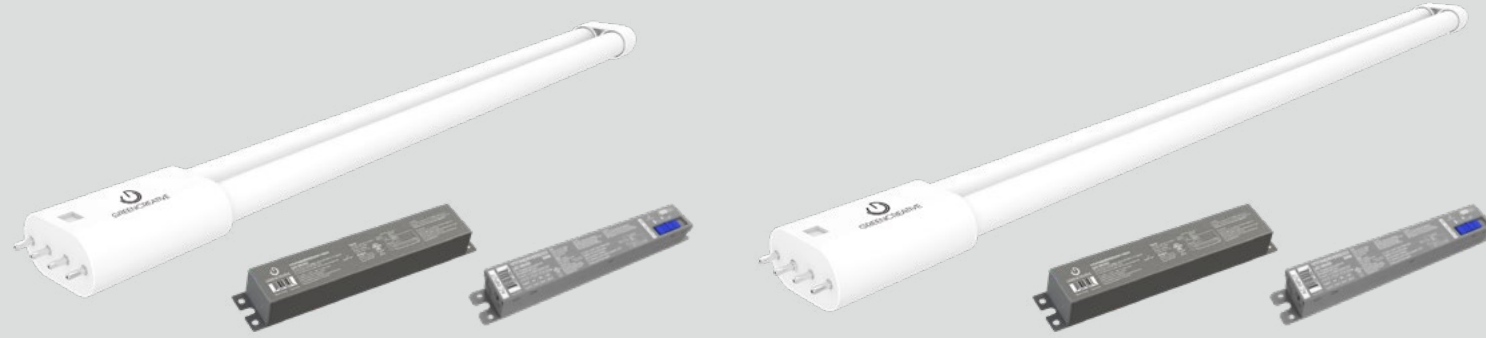

- Options of single voltage or SelectDrive external drivers
- Replaces 36W / 40W 4-pin (2G11) CFL lamps
- 0-10V dimming
- Suitable for use in enclosed fixtures

- Plug & Play installation (electronic ballasts only)
- Compatible with G24q & GX24q sockets
- 310° rotatable base allows light to be directed as needed
- Compatible with select 0-10V dimmable ballasts and controls
- Ballast Adaptive Technology allows one LED lamp to be powered by a range of fluorescent ballasts instead of restricting to one wattage rating

High Flexibility - Ballast Adaptive Technology

Ballast Type	Lumens	Bare Lamp
13W	600	4.5W
18W	700	5.5W
26W	1020	8.5W

PL H 8.5W DIR




SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.
36703	13PLL/830/EXT	3000K	1,800	82	138	Yes	36W	110°	50,000	120-277V	Yes
36704	13PLL/835/EXT	3500K	1,800	82	138	Yes	36W	110°	50,000	120-277V	Yes
36705	13PLL/840/EXT	4000K	2,000	82	154	Yes	36W	110°	50,000	120-277V	Yes
36706	14PLL/830/EXT	3000K	2,000	82	143	Yes	40W	140°	50,000	120-277V	Yes
36707	14PLL/835/EXT	3500K	2,000	82	143	Yes	40W	140°	50,000	120-277V	Yes
36708	14PLL/840/EXT	4000K	2,200	82	157	Yes	40W	140°	50,000	120-277V	Yes
36709	19PLL/830/EXT	3000K	2,600	82	137	Yes	40W	140°	50,000	120-277V	Yes
36710	19PLL/835/EXT	3500K	2,600	82	137	Yes	40W	140°	50,000	120-277V	Yes
36711	19PLL/840/EXT	4000K	2,800	82	147	Yes	40W	140°	50,000	120-277V	Yes
35896	15T8T5HEDRIVER/SD/2CH	15W / SelectDrive 120-277V with 0-10V Dimming External LED Driver for use with 1-2 PLL EXT Lamps									
35897	15T8T5HEDRIVER/SD/4CH	15W / SelectDrive 120-277V with 0-10V Dimming External LED Driver for use with 1-4 PLL EXT Lamps									
98259	15T8T5HEDRIVER/2CH/R	15W / 120-277V with 0-10V Dimming External LED Driver for use with 1-2 PLL EXT Lamps									
98260	15T8T5HEDRIVER/4CH/R	15W / 120-277V with 0-10V Dimming External LED Driver for use with 1-4 PLL EXT Lamps									
98261	24T5HODRIVER/2CH/R	24W / 120-277V with 0-10V Dimming External LED Driver for use with 1-2 PLL EXT Lamps									
98262	24T5HODRIVER/4CH/R	24W / 120-277V with 0-10V Dimming External LED Driver for use with 1-4 PLL EXT Lamps									
35797	FU10W/T5T8/EXT/EMDRIVER	10.7W EM Driver for use with EXT Type C PLL Systems									
35798	FU13W/T5T8/EXT/EMDRIVER	13.7W EM Driver for use with EXT Type C PLL Systems									
35799	FU17W/T5T8/EXT/EMDRIVER	17W EM Driver for use with EXT Type C PLL Systems									

SPECIFICATIONS													
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC	
57895	5.5PLH/827/DIR/RC	2700K	520	82	95	Yes	13-18W	110°	50,000	120-277V	No	N.A.	
57896	5.5PLH/830/DIR/RC	3000K	550	82	100	Yes	13-18W	110°	50,000	120-277V	No	N.A.	
57897	5.5PLH/835/DIR/RC	3500K	550	82	100	Yes	13-18W	110°	50,000	120-277V	No	N.A.	
57898	5.5PLH/840/DIR/RC	4000K	560	82	102	Yes	13-18W	110°	50,000	120-277V	No	N.A.	
28366	8.5PLH/827/DIR/R	2700K	870	82	102	Yes	26W	110°	50,000	120-277V	No	✓	
28367	8.5PLH/830/DIR/R	3000K	950	82	112	Yes	26W	110°	50,000	120-277V	No	✓	
28368	8.5PLH/835/DIR/R	3500K	950	82	112	Yes	26W	110°	50,000	120-277V	No	✓	
28369	8.5PLH/840/DIR/R	4000K	1,020	82	120	Yes	26W	110°	50,000	120-277V	No	✓	
57903	10.5PLH/930/DIR	3000K	890	92	85	Yes	26W	110°	50,000	120-277V	No	N.A.	
98244	14.5PLH/830/DIR	3000K	1,700	82	117	Yes	42W	110°	50,000	120-277V	No	N.A.	
98245	14.5PLH/835/DIR	3500K	1,750	82	121	Yes	42W	110°	50,000	120-277V	No	N.A.	
98246	14.5PLH/840/DIR	4000K	1,800	82	124	Yes	42W	110°	50,000	120-277V	No	N.A.	



# PL DIR LINE

# PL BYP / HYBM LINE



High Flexibility - Ballast Adaptive Technology		
Ballast Type	Lumens	Bare Lamp
13W	590	5W
18W	820	6W
26W	1020	9.5W

PL V 9.5W DIR

- Plug & Play installation (electronic ballasts only)
- Compatible with G24q & GX24q sockets
- Patented design
- Compatible with select 0-10V dimmable ballasts and controls
- Ballast Adaptive Technology allows one LED lamp to be powered by a range of fluorescent ballasts instead of restricting to one wattage rating

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
28370	6PLV/827/DIR/R	2700K	600	82	100	Yes	13-18W	120°	50,000	120-277V	No	N.A.
28371	6PLV/830/DIR/R	3000K	620	82	103	Yes	13-18W	120°	50,000	120-277V	No	N.A.
28372	6PLV/835/DIR/R	3500K	620	82	103	Yes	13-18W	120°	50,000	120-277V	No	N.A.
28373	6PLV/840/DIR/R	4000K	640	82	107	Yes	13-18W	120°	50,000	120-277V	No	N.A.
28374	9.5PLV/827/DIR/R	2700K	950	82	100	Yes	26W	120°	50,000	120-277V	No	✓
28375	9.5PLV/830/DIR/RC	3000K	1,000	82	105	Yes	26W	120°	50,000	120-277V	No	✓
28376	9.5PLV/835/DIR/RC	3500K	1,000	82	105	Yes	26W	120°	50,000	120-277V	No	✓
28377	9.5PLV/840/DIR/RC	4000K	1,020	82	107	Yes	26W	120°	50,000	120-277V	No	✓
57918	11PLV/930/DIR/R	3000K	920	92	84	Yes	26W	120°	50,000	120-277V	No	N.A.
98248	17PLV/830/DIR	3000K	1,900	82	112	Yes	42W	120°	50,000	120-277V	No	✓
98249	17PLV/835/DIR	3500K	1,950	82	115	Yes	42W	120°	50,000	120-277V	No	✓
98250	17PLV/840/DIR	4000K	2,000	82	118	Yes	42W	120°	50,000	120-277V	No	✓



- HYBRid installation - DIRect or BYPass
- Compatible with magnetic ballasts - DIRect installation
- Built-in universal voltage driver - BYPass installation
- 310° rotatable base allows light to be directed as needed

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
36086	5.5PLH/827/HYBM	2700K	550	82	100	No	13-18W	110°	50,000	120-277V	No	N.A.
34856	5.5PLH/830/HYBM	3000K	550	82	100	No	13-18W	110°	50,000	120-277V	No	N.A.
36642	5.5PLH/835/HYBM/R	3500K	600	82	109	No	13-18W	110°	50,000	120-277V	No	N.A.
36643	5.5PLH/840/HYBM/R	4000K	620	82	113	No	13-18W	110°	50,000	120-277V	No	N.A.
98399	8PLH/827/HYBM	2700K	870	82	109	No	26W	110°	50,000	120-277V	No	N.A.
98400	8PLH/830/HYBM	3000K	920	82	115	No	26W	110°	50,000	120-277V	No	N.A.
98401	8PLH/835/HYBM	3500K	920	82	115	No	26W	110°	50,000	120-277V	No	N.A.
98402	8PLH/840/HYBM	4000K	950	82	119	No	26W	110°	50,000	120-277V	No	N.A.
36638	15.5PLH/827/BYP/R	2700K	1,750	82	113	No	42W	110°	50,000	120-277V	No	N.A.
36639	15.5PLH/830/BYP/R	3000K	1,850	82	119	No	42W	110°	50,000	120-277V	No	N.A.
36640	15.5PLH/835/BYP/R	3500K	1,950	82	126	No	42W	110°	50,000	120-277V	No	N.A.
36641	15.5PLH/840/BYP/R	4000K	2,000	82	129	No	42W	110°	50,000	120-277V	No	N.A.


Note: PL H 15.5W BYP operates on line voltage only and is not compatible with magnetic ballasts



- **HYBRID installation - DIRECT or BYPass**
- **Compatible with magnetic ballasts - DIRECT installation**
- **Built-in universal voltage driver - BYPass installation**
- **Patented design**

SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.
98385	5.5PLV/835/HYBM	3500K	600	82	109	No	13-18W	120°	50,000	120-277V	No
98386	5.5PLV/840/HYBM	4000K	620	82	113	No	13-18W	120°	50,000	120-277V	No
98387	8.5PLV/827/HYBM	2700K	950	82	112	No	26W	120°	50,000	120-277V	No
98388	8.5PLV/830/HYBM	3000K	1,000	82	118	No	26W	120°	50,000	120-277V	No
98389	8.5PLV/835/HYBM	3500K	1,000	82	118	No	26W	120°	50,000	120-277V	No
98390	8.5PLV/840/HYBM	4000K	1,020	82	120	No	26W	120°	50,000	120-277V	No
98256	16.5PLV/830/BYP	3000K	1,800	82	109	No	42W	120°	50,000	120-277V	No
98257	16.5PLV/835/BYP	3500K	1,850	82	112	No	42W	120°	50,000	120-277V	No
98258	16.5PLV/840/BYP	4000K	1,900	82	115	No	42W	120°	50,000	120-277V	No

Note: PL V 16.5W BYP operates on line voltage only and is not compatible with magnetic ballasts






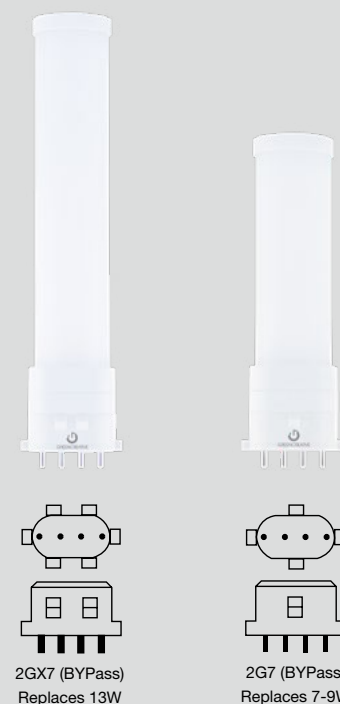


Extra Wide Beam Design - 180° Rotatable Base



- **BYPass installation – Requires bypassing the ballast**
- **Suitable for use in totally enclosed fixtures**
- **180° rotatable base**
- **Compact form factor fits most fixtures**

SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.
36631	3.5PLS/835/BYP/2G7/R	3500K	350	82	100	No	7-9W	120°	50,000	120-277V	Yes
36637	5.5PLS/835/BYP/2GX7/R	3500K	600	82	109	No	13W	120°	50,000	120-277V	Yes

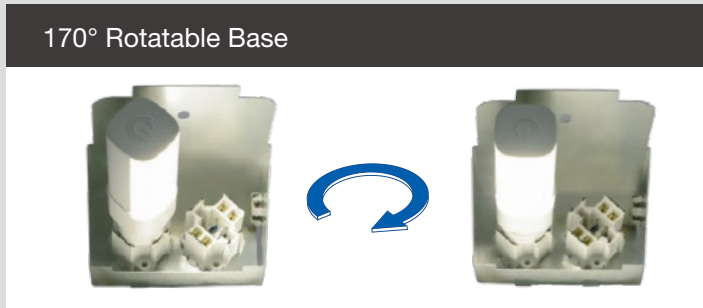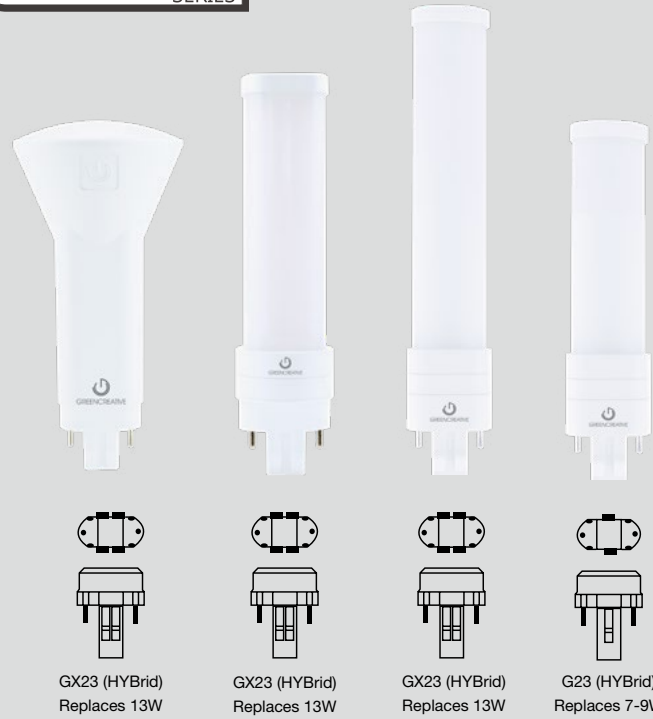

- **HYBrid installation - DIRECT or BYPass**
- **Compatible with magnetic ballasts - DIRECT installation**
- **Built-in universal voltage driver - BYPass installation**
- **Exceptional efficacy**







- **Plug & Play installation (electronic ballasts only)**
- **Omni directional light distribution suitable for horizontal or vertical installations**
- **Replaces G24q & GX24q (4-pin) 13W-26W CFL lamps**
- **0-10V dimming ballast compatible**

SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.
36627	3.5PLS/827/HYB/G23/R	2700K	325	82	93	No	7-9W	120°	50,000	120-277V	No
36628	3.5PLS/830/HYB/G23/R	3000K	340	82	97	No	7-9W	120°	50,000	120-277V	No
36629	3.5PLS/835/HYB/G23/R	3500K	350	82	100	No	7-9W	120°	50,000	120-277V	No
36630	3.5PLS/840/HYB/G23/R	4000K	370	82	106	No	7-9W	120°	50,000	120-277V	No
98403	5.5PLSV/827/HYB/GX23	2700K	570	82	104	No	13W	120°	50,000	120-277V	No
98404	5.5PLSV/830/HYB/GX23	3000K	600	82	109	No	13W	120°	50,000	120-277V	No
98405	5.5PLSV/835/HYB/GX23	3500K	600	82	109	No	13W	120°	50,000	120-277V	No
98406	5.5PLSV/840/HYB/GX23	4000K	620	82	113	No	13W	120°	50,000	120-277V	No
36644	5.5PLSH/827/HYB/GX23/R	2700K	570	82	104	No	13W	110°	50,000	120-277V	No
36645	5.5PLSH/830/HYB/GX23/R	3000K	580	82	105	No	13W	110°	50,000	120-277V	No
36646	5.5PLSH/835/HYB/GX23/R	3500K	600	82	109	No	13W	110°	50,000	120-277V	No
36647	5.5PLSH/840/HYB/GX23/R	4000K	620	82	113	No	13W	110°	50,000	120-277V	No
36632	5.5PLS/827/HYB/GX23/R	2700K	520	82	95	No	13W	120°	50,000	120-277V	No
36633	5.5PLS/830/HYB/GX23/R	3000K	550	82	100	No	13W	120°	50,000	120-277V	No
36634	5.5PLS/835/HYB/GX23/R	3500K	600	82	109	No	13W	120°	50,000	120-277V	No
36635	5.5PLS/840/HYB/GX23/R	4000K	620	82	113	No	13W	120°	50,000	120-277V	No

SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.
34988	6.5PLO/827/DIR	2700K	720	82	110	Yes	13-18W	360°	50,000	120-277V	Yes
34989	6.5PLO/830/DIR	3000K	740	82	113	Yes	13-18W	360°	50,000	120-277V	Yes
34990	6.5PLO/835/DIR	3500K	780	82	120	Yes	13-18W	360°	50,000	120-277V	Yes
34991	6.5PLO/840/DIR	4000K	800	82	123	Yes	13-18W	360°	50,000	120-277V	Yes
34992	9.5PLO/827/DIR	2700K	1,050	82	110	Yes	26W	360°	50,000	120-277V	Yes
34993	9.5PLO/830/DIR	3000K	1,100	82	115	Yes	26W	360°	50,000	120-277V	Yes
34994	9.5PLO/835/DIR	3500K	1,150	82	121	Yes	26W	360°	50,000	120-277V	Yes
34995	9.5PLO/840/DIR	4000K	1,200	82	126	Yes	26W	360°	50,000	120-277V	Yes



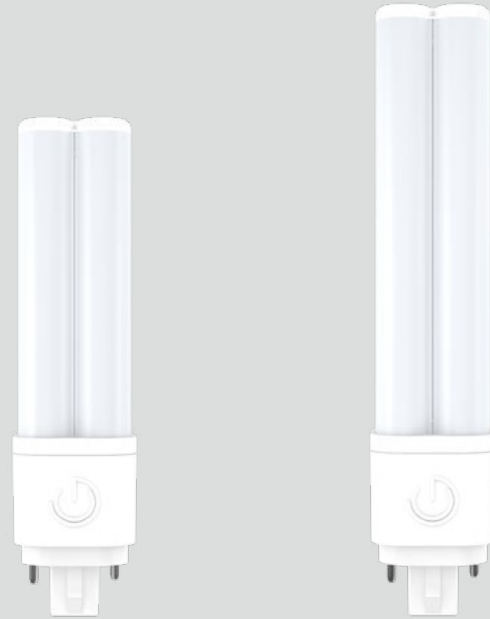

### 3 Level power output



Power select switch allows light output to be tailored to application requirements and can be adjusted from high to low.



- Integral driver suitable for 120-277V
- E26 version is dimmable at 120V line voltage
- EX39 version has integrated side switch for field selectable lumen output
- Suitable for use in totally enclosed fixtures
- Integral 6kV surge protector

- Compatible with magnetic ballasts - DIRect installation
- Built-in universal voltage driver - BYPass installation
- Omni directional light distribution suitable for horizontal or vertical installations
- Replaces G24q & GX24q (4-pin) or G24d & GX24d (2-pin) 13W-26W CFL lamps

### SPECIFICATIONS


Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.
34996	7PLO/827/HYBM	2700K	770	82	110	No	13-18W	360°	50,000	120-277V	Yes
34997	7PLO/830/HYBM	3000K	790	82	112	No	13-18W	360°	50,000	120-277V	Yes
34998	7PLO/835/HYBM	3500K	820	82	117	No	13-18W	360°	50,000	120-277V	Yes
34999	7PLO/840/HYBM	4000K	850	82	121	No	13-18W	360°	50,000	120-277V	Yes
35000	9PLO/827/HYBM	2700K	1,100	82	122	No	26W	360°	50,000	120-277V	Yes
35001	9PLO/830/HYBM	3000K	1,150	82	125	No	26W	360°	50,000	120-277V	Yes
35002	9PLO/835/HYBM	3500K	1,200	82	130	No	26W	360°	50,000	120-277V	Yes
35003	9PLO/840/HYBM	4000K	1,250	82	133	No	26W	360°	50,000	120-277V	Yes

### SPECIFICATIONS

Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	DLC
36165	17A21/830/277V/DIM	3000K	2,000	82	118	Yes	125W	230°	50,000	120-277V	N.A.
36166	17A21/835/277V/DIM	3500K	2,000	82	118	Yes	125W	230°	50,000	120-277V	N.A.
36167	17A21/840/277V/DIM	4000K	2,100	82	124	Yes	125W	230°	50,000	120-277V	N.A.
36168	17A21/850/277V/DIM	5000K	2,100	82	124	Yes	125W	230°	50,000	120-277V	N.A.
36169	24HID/830/277V/E26/DIM	3000K	3,100	82	129	Yes	200W	230°	50,000	120-277V	N.A.
36214	24HID/835/277V/E26/DIM	3500K	3,100	82	129	Yes	200W	230°	50,000	120-277V	N.A.
36170	24HID/840/277V/E26/DIM	4000K	3,200	82	133	Yes	200W	230°	50,000	120-277V	N.A.
36171	24HID/850/277V/E26/DIM	5000K	3,200	82	133	Yes	200W	230°	50,000	120-277V	N.A.
36158	24HID/830/277V/EX39/SD	3000K	3,100	82	129	No	200W	230°	50,000	120-277V	✓
36159	24HID/835/277V/EX39/SD	3500K	3,100	82	129	No	200W	230°	50,000	120-277V	✓
36160	24HID/840/277V/EX39/SD	4000K	3,200	82	133	No	200W	230°	50,000	120-277V	✓
36161	24HID/850/277V/EX39/SD	5000K	3,200	82	133	No	200W	230°	50,000	120-277V	✓
36172	34HID/830/277V/E26/DIM	3000K	4,500	82	132	Yes	300W	230°	50,000	120-277V	N.A.
36173	34HID/840/277V/E26/DIM	4000K	5,000	82	147	Yes	300W	230°	50,000	120-277V	N.A.
36174	34HID/850/277V/E26/DIM	5000K	5,000	82	147	Yes	300W	230°	50,000	120-277V	N.A.
36162	34HID/830/277V/EX39/SD	3000K	4,500	82	132	No	175W	230°	50,000	120-277V	✓
36163	34HID/840/277V/EX39/SD	4000K	5,000	82	147	No	175W	230°	50,000	120-277V	✓
36164	34HID/850/277V/EX39/SD	5000K	5,000	82	147	No	175W	230°	50,000	120-277V	✓
16325	E26 EXTENDER	E26 Lamp Extender Adds 1.30" (33mm) to Lamp Height									
35050	EX39 EXTENDER	EX39 Lamp Extender Adds 1.70" (43mm) to Lamp Height									
97718	10SURGE/277V	10kV Surge Protector									

# HID POST TOP LINE

# HID HIGH BAY / LOW BAY LINE

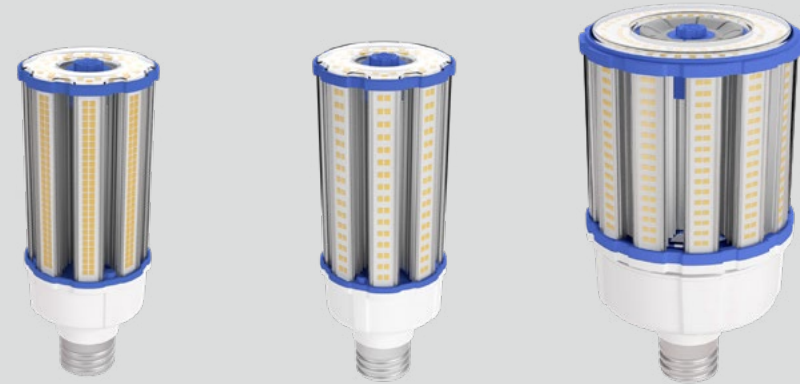

**Integral Rotary Dimming Control**

Factory default setting: 100% lumen output

Rotate counterclockwise to reduce lumen output

Rotate clockwise to increase the lumen output

Integral dimming control allows light output to be tailored to application requirements and can be adjusted from 0-100% with no additional wiring or controls needed.

- 175W/250W/400W HID replacements
- Integrated rotary dimmer control
- Integral 6kV surge protector
- Thermal protection against overheating

SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
35887	54HID/840/277V/EX39/RC	4000K	7,700	82	143	175-250W	320°	50,000	120-277V	Yes	✓
35888	54HID/850/277V/EX39/RC	5000K	7,700	82	143	175-250W	320°	50,000	120-277V	Yes	✓
35889	63HID/840/277V/EX39/RC	4000K	9,500	82	150	175-250W	320°	50,000	120-277V	Yes	✓
35890	63HID/850/277V/EX39/RC	5000K	9,500	82	150	175-250W	320°	50,000	120-277V	Yes	✓
35891	100HID/840/277V/EX39/RC	4000K	14,500	82	145	250-400W	320°	50,000	120-277V	Yes	✓
35892	100HID/850/277V/EX39/RC	5000K	14,500	82	145	250-400W	320°	50,000	120-277V	Yes	✓
35050	EX39 EXTENDER	EX39 Lamp Extender Adds 1.70" (43mm) to Lamp Height									
97718	10SURGE/277V	10kV Surge Protector									




- Integral driver suitable for 120-277V
- Visible uplighting
- Compatible with EX39 & E39 sockets
- Exceptional efficacy >126 LPW

**Intentional Uplighting**

All High Bay and Low Bay products feature a ring of LEDs mounted around the base to provide visible uplighting for improved aesthetics and comfort

SPECIFICATIONS													
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC / T24	
35089	35HIDLB/840/BYP/E26/R	4000K	4,550	82	130	No	100-175W HID	110°	50,000	120-277V	No	N.A. / N.A.	
35090	35HIDLB/850/BYP/E26/R	5000K	4,650	82	133	No	100-175W HID	110°	50,000	120-277V	No	N.A. / N.A.	
35087	35HIDLB/840/BYP/EX39/R	4000K	4,550	82	130	No	100-175W HID	110°	50,000	120-277V	No	✓ / N.A.	
35088	35HIDLB/850/BYP/EX39/R	5000K	4,650	82	133	No	100-175W HID	110°	50,000	120-277V	No	✓ / N.A.	
35091	65HIDHB/840/BYP/EX39/R	4000K	8,970	82	138	No	175-250W HID	110°	50,000	120-277V	No	✓ / N.A.	
35092	65HIDHB/850/BYP/EX39/R	5000K	9,100	82	140	No	175-250W HID	110°	50,000	120-277V	No	✓ / N.A.	
35093	90HIDHB/840/BYP/EX39/R	4000K	12,420	82	138	No	250-400W HID	110°	50,000	120-277V	No	✓ / N.A.	
35094	90HIDHB/850/BYP/EX39/R	5000K	12,600	82	140	No	250-400W HID	110°	50,000	120-277V	No	✓ / N.A.	
35059	120HIDHB/840/BYP/EX39	4000K	17,760	82	148	No	250-400W HID	110°	50,000	120-277V	No	✓ / N.A.	
35060	120HIDHB/850/BYP/EX39	5000K	18,000	82	150	No	250-400W HID	110°	50,000	120-277V	No	✓ / N.A.	
34985	135HIDHB/840/BYP/EX39	4000K	20,000	82	148	No	250-400W HID	120°	50,000	120-277V	No	✓ / N.A.	
34986	135HIDHB/850/BYP/EX39	5000K	20,000	82	148	No	250-400W HID	120°	50,000	120-277V	No	✓ / N.A.	
35011	135HIDHBSSEN/840/BYP/EX39	4000K	20,000	82	148	No	250-400W HID	120°	50,000	120-277V	No	✓ / N.A.	
35012	135HIDHBSSEN/850/BYP/EX39	5000K	20,000	82	148	No	250-400W HID	120°	50,000	120-277V	No	✓ / N.A.	
35592	135HIDHBSSEN/840/BYP/EX39/T24	4000K	20,000	82	148	No	250-400W HID	120°	50,000	120-277V	No	✓ / ✓	
35593	135HIDHBSSEN/850/BYP/EX39/T24	5000K	20,000	82	148	No	250-400W HID	120°	50,000	120-277V	No	✓ / ✓	

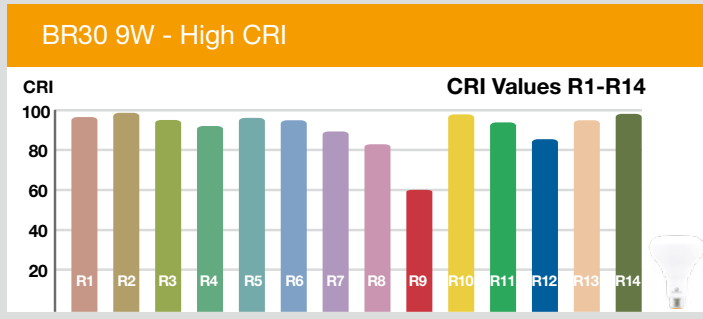

- Suitable to replace 45W-75W incandescent lamps
- Dimmable with forward and reverse phase controls
- Suitable for use in totally enclosed fixtures
- Suitable for use in damp locations

- Suitable to replace 45W, 65W, 75W, 85W incandescent
- Energy efficient and environmentally friendly
- Provides comfortable, diffused light
- Dimmable with forward and reverse phase controls


SPECIFICATIONS										
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage
36688	7R20DIM/927	2700K	590	93	84	Yes	45W	120°	25,000	120V
36689	7R20DIM/930	3000K	590	93	84	Yes	45W	120°	25,000	120V
36690	7R20DIM/940	4000K	590	93	84	Yes	45W	120°	25,000	120V
36691	9BR30DIM/927	2700K	770	93	86	Yes	65W	120°	25,000	120V
36692	9BR30DIM/930	3000K	770	93	86	Yes	65W	120°	25,000	120V
36693	9BR30DIM/940	4000K	770	93	86	Yes	65W	120°	25,000	120V
36697	11BR40DIM/927	2700K	950	93	86	Yes	75W	120°	25,000	120V
36698	11BR40DIM/930	3000K	950	93	86	Yes	75W	120°	25,000	120V
36699	11BR40DIM/940	4000K	950	93	86	Yes	75W	120°	25,000	120V

SPECIFICATIONS													
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	ES	
98460	7.5R20DIM/827	2700K	525	82	70	Yes	45W	120°	25,000	120V	Yes	✓	
98461	9BR30DIM/827	2700K	650	82	72	Yes	65W	120°	25,000	120V	Yes	✓	
98462	9BR30DIM/830	3000K	650	82	72	Yes	65W	120°	25,000	120V	Yes	✓	
98463	9BR30DIM/840	4000K	650	82	72	Yes	65W	120°	25,000	120V	Yes	✓	
98464	11BR40DIM/827	2700K	950	82	86	Yes	75W	120°	25,000	120V	Yes	✓	
98465	11BR40DIM/830	3000K	950	82	86	Yes	75W	120°	25,000	120V	Yes	✓	
98466	15.5BR40DIM/827	2700K	1,100	82	71	Yes	85W	120°	25,000	120V	No	✓	
98467	15.5BR40DIM/830	3000K	1,100	82	71	Yes	85W	120°	25,000	120V	No	✓	





- Suitable to replace 40W, 60W, 75W, 100W incandescent lamps
- High CRI and R values (R9 57, R13 95)
- Suitable for use in totally enclosed fixtures

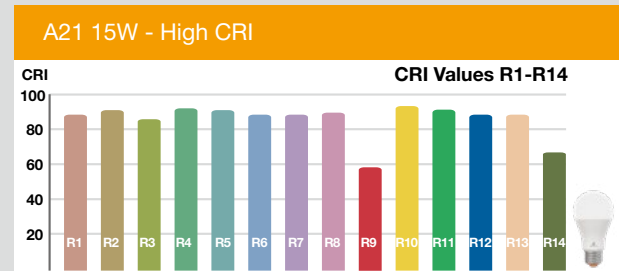

- Suitable to replace 60W, 75W, 100W incandescent lamps
- Provides comfortable, diffused light
- Dimmable with forward and reverse phase controls

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	ES / JA8 / T20
36552	6A19DIM/927	2700K	480	92	90	Yes	40W	230°	25,000	120V	Yes	✓ / N.A. / ✓
36553	6A19DIM/930	3000K	480	92	90	Yes	40W	230°	25,000	120V	Yes	✓ / N.A. / ✓
98560	9A19DIM/930	3000K	800	92	89	Yes	60W	240°	25,000	120V	Yes	✓ / N.A. / ✓
98561	9A19DIM/940	4000K	820	92	91	Yes	60W	240°	25,000	120V	Yes	✓ / N.A. / ✓
36554	9A19DIM/927/R	2700K	800	92	89	Yes	60W	230°	25,000	120V	Yes	✓ / N.A. / ✓
36555	9A19DIM/930/R	3000K	820	92	91	Yes	60W	230°	25,000	120V	Yes	✓ / N.A. / ✓
36560	9A19DIM/935/R	3500K	840	92	93	Yes	60W	230°	25,000	120V	Yes	✓ / N.A. / ✓
36556	9A19DIM/940/R	4000K	860	92	96	Yes	60W	230°	25,000	120V	Yes	✓ / N.A. / ✓
36557	9A19DIM/950/R	5000K	860	92	96	Yes	60W	230°	25,000	120V	Yes	✓ / N.A. / ✓
98565	9A19DIM/927/GU24/R	2700K	860	92	96	Yes	60W	240°	25,000	120V	Yes	✓ / ✓ / ✓
36675	9A19DIM/927/GU24/RC	2700K	800	92	89	Yes	60W	230°	25,000	120V	Yes	- / N.A. / -
36676	9A19DIM/930/GU24/RC	3000K	820	92	91	Yes	60W	230°	25,000	120V	Yes	- / N.A. / -
36677	9A19DIM/940/GU24/RC	4000K	860	92	96	Yes	60W	230°	25,000	120V	Yes	- / N.A. / -
36678	9A19DIM/950/GU24/RC	5000K	860	92	96	Yes	60W	230°	25,000	120V	Yes	- / N.A. / -
98141	11A19DIM/927	2700K	1,100	92	100	Yes	75W	240°	25,000	120V	Yes	✓ / N.A. / ✓
98142	11A19DIM/930	3000K	1,150	92	105	Yes	75W	240°	25,000	120V	Yes	✓ / N.A. / ✓
98143	11A19DIM/940	4000K	1,200	92	109	Yes	75W	240°	25,000	120V	Yes	✓ / N.A. / ✓
36679	11A19DIM/927/R	2700K	1,100	92	100	Yes	75W	230°	25,000	120V	Yes	- / N.A. / -
36680	11A19DIM/930/R	3000K	1,150	92	105	Yes	75W	230°	25,000	120V	Yes	- / N.A. / -
36681	11A19DIM/940/R	4000K	1,200	92	109	Yes	75W	230°	25,000	120V	Yes	- / N.A. / -
36682	11A19DIM/950/R	5000K	1,200	92	109	Yes	75W	230°	25,000	120V	Yes	- / N.A. / -
98147	15A21DIM/927/N	2700K	1,600	92	107	Yes	100W	240°	25,000	120V	Yes	✓ / N.A. / ✓
98148	15A21DIM/930/N	3000K	1,650	92	110	Yes	100W	240°	25,000	120V	Yes	✓ / N.A. / ✓
98149	15A21DIM/940/N	4000K	1,700	92	113	Yes	100W	240°	25,000	120V	Yes	✓ / N.A. / ✓

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	ES
36548	9A19DIM/827/R	2700K	800	82	89	Yes	60W	230°	25,000	120V	Yes	✓
36549	9A19DIM/830/R	3000K	820	82	91	Yes	60W	230°	25,000	120V	Yes	✓
36559	9A19DIM/835/R	3500K	840	82	93	Yes	60W	230°	25,000	120V	Yes	✓
36550	9A19DIM/840/R	4000K	860	82	96	Yes	60W	230°	25,000	120V	Yes	✓
36551	9A19DIM/850/R	5000K	860	82	96	Yes	60W	230°	25,000	120V	Yes	✓
97908	9A19DIM/827/GU24/R	2700K	800	82	89	Yes	60W	240°	25,000	120V	Yes	✓
97909	9A19DIM/830/GU24/R	3000K	820	82	91	Yes	60W	240°	25,000	120V	Yes	✓
97910	9A19DIM/840/GU24/R	4000K	860	82	96	Yes	60W	240°	25,000	120V	Yes	✓
36544	9.5A19DIM/827	2700K	800	82	84	Yes	60W	230°	15,000	120V	Open	✓
36545	9.5A19DIM/830	3000K	820	82	86	Yes	60W	230°	15,000	120V	Open	✓
36546	9.5A19DIM/840	4000K	860	82	91	Yes	60W	230°	15,000	120V	Open	✓
36547	9.5A19DIM/850	5000K	860	82	91	Yes	60W	230°	15,000	120V	Open	✓
98138	11A19DIM/827	2700K	1,100	82	100	Yes	75W	240°	25,000	120V	Yes	✓
98139	11A19DIM/830	3000K	1,150	82	105	Yes	75W	240°	25,000	120V	Yes	✓
98140	11A19DIM/840	4000K	1,200	82	109	Yes	75W	240°	25,000	120V	Yes	✓
36615	13A19DIM/827	2700K	1,100	82	85	Yes	60W	230°	15,000	120V	Yes	✓
36616	13A19DIM/830	3000K	1,150	82	88	Yes	60W	230°	15,000	120V	Yes	✓
36617	13A19DIM/840	4000K	1,200	82	92	Yes	60W	230°	15,000	120V	Yes	✓
36618	13A19DIM/850	5000K	1,200	82	92	Yes	60W	230°	15,000	120V	Yes	✓
98144	15A21DIM/827	2700K	1,600	82	107	Yes	100W	240°	25,000	120V	Yes	✓
98145	15A21DIM/830	3000K	1,650	82	110	Yes	100W	240°	25,000	120V	Yes	✓
98146	15A21DIM/840	4000K	1,700	82	113	Yes	100W	240°	25,000	120V	Yes	✓
98150	15A21DIM/827/GU24	2700K	1,600	82	107	Yes	100W	240°	25,000	120V	Yes	✓

# FILAMENT LINE



Suitable for All Decorative Applications




- Micro-designed driver - No heatsink required
- Provides comfortable, diffused light
- Dimmable with forward and reverse phase controls
- Most models are suitable for wet locations

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Finish	ES / T20
98458	1FS14/820/A	2000K	35	82	75	Yes	10W	300°	15,000	120V	Amber	N.A. / N.A.
98457	1FS14/827	2700K	55	82	37	Yes	10W	300°	15,000	120V	Clear	N.A. / N.A.
57946	3.5FT10DIM/822/A	2200K	250	82	90	Yes	25W	330°	15,000	120V	Amber	N.A. / N.A.
98240	4.5FBA11DIM/820/FT/A	2000K	240	82	68	Yes	40W	300°	15,000	120V	Amber	N.A. / N.A.
98241	3.3FB11DIM/927	2700K	300	92	90	Yes	40W	300°	15,000	120V	Clear	✓ / ✓
98454	5FB11DIM/827	2700K	500	82	107	Yes	60W	300°	15,000	120V	Clear	N.A. / N.A.
98455	5FB11DIM/827/E26	2700K	500	82	93	Yes	60W	300°	15,000	120V	Clear	✓ / N.A.
98239	4FST19DIM/820/A	2000K	300	82	90	Yes	40W	300°	15,000	120V	Amber	N.A. / N.A.
98376	5FA19DIM/827	2700K	450	82	63	Yes	40W	300°	15,000	120V	Clear	N.A. / N.A.
98448	7.5FA19DIM/820/A	2000K	600	82	94	Yes	60W	300°	15,000	120V	Amber	N.A. / N.A.
98278	7.5FA19DIM/827	2700K	800	82	91	Yes	60W	300°	15,000	120V	Clear	✓ / N.A.
98449	7.5FA19DIM827/FR	2700K	800	82	91	Yes	60W	300°	15,000	120V	Frosted	N.A. / N.A.
98358	7.5FA19DIM/827/SB	2700K	700	82	53	Yes	60W	N.A.	15,000	120V	Silver Bowl	N.A. / N.A.
98279	9FA19DIM/927	2700K	810	92	79	Yes	60W	300°	15,000	120V	Clear	✓ / ✓
98451	4FG16.5DIM/827	2700K	350	82	100	Yes	40W	300°	15,000	120V	Clear	N.A. / N.A.
97826	4.5FG25DIM/827/SB	2700K	400	82	63	Yes	40W	N.A.	15,000	120V	Silver Bowl	N.A. / N.A.
57945	5FG40DIM/827	2700K	470	82	35	No	40W	330°	15,000	120V	Clear	✓ / N.A.

# PREMIUM FILAMENT LINE



Suitable for All Decorative Applications

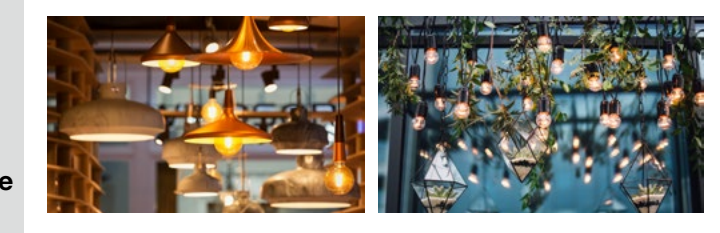

- Suitable for use in wet locations
- 320° omnidirectional beam angle
- High CRI and R values (R9 53, R13 93)
- Smooth dimming with most forward and reverse phase controls

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Finish	ES / T20
36075	3FT6DIM/820/A/R	2000K	110	82	37	Yes	25W	320°	15,000	120V	Amber	N.A. / N.A.
36077	1FS14/827/R	2700K	55	82	55	No	11W	320°	15,000	120V	Clear	N.A. / N.A.
36078	1FS14/820/A/R	2000K	35	82	35	No	11W	320°	15,000	120V	Amber	N.A. / N.A.
36079	5FA19DIM/927/R	2700K	450	92	90	Yes	40W	320°	15,000	120V	Clear	✓ / ✓
36080	5FA19DIM/927/FR/R	2700K	450	92	90	Yes	40W	320°	15,000	120V	Frosted	✓ / ✓
36081	5FA19DIM/820/A/R	2000K	340	82	68	Yes	40W	320°	15,000	120V	Amber	N.A. / N.A.
36082	9FA19DIM/927/R	2700K	810	92	90	Yes	60W	320°	15,000	120V	Clear	✓ / ✓
36083	9FA19DIM/927/FR/R	2700K	810	92	89	Yes	60W	320°	15,000	120V	Frosted	✓ / ✓
36085	7.5FA19DIM/827/SB/R	2700K	700	82	93	Yes	60W	320°	15,000	120V	Silver Bowl	N.A. / N.A.
36061	3.3FB11DIM/927/R	2700K	300	92	91	Yes	40W	320°	15,000	120V	Clear	✓ / ✓
36062	3.3FB11DIM/927/E26/R	2700K	300	92	91	Yes	40W	320°	15,000	120V	Clear	✓ / ✓
36063	3.3FB11DIM/927/FR/R	2700K	300	92	91	Yes	40W	320°	15,000	120V	Frosted	✓ / ✓
36064	5.5FB11DIM/927/R	2700K	500	92	91	Yes	60W	320°	15,000	120V	Clear	✓ / ✓
36065	5.5FB11DIM/927/E26/R	2700K	500	92	91	Yes	60W	320°	15,000	120V	Clear	✓ / ✓
36066	3.5FBA11DIM/820/FT/A/R	2000K	240	82	69	Yes	40W	320°	15,000	120V	Amber	N.A. / N.A.
36067	3.8FG16.5DIM/927/R	2700K	350	92	91	Yes	40W	320°	15,000	120V	Clear	✓ / ✓
36068	3.8FG16.5DIM/927/E26/R	2700K	350	92	91	Yes	40W	320°	15,000	120V	Clear	✓ / ✓
36069	4FG16.5DIM/820/A/R	2000K	250	82	63	Yes	40W	320°	15,000	120V	Amber	N.A. / N.A.
36070	3.8FG25DIM/927/R	2700K	350	92	92	Yes	40W	320°	15,000	120V	Clear	✓ / ✓
36071	4FG25DIM/820/A/R	2000K	250	82	63	Yes	40W	320°	15,000	120V	Amber	N.A. / N.A.
36072	4.5FG25DIM/827/SB/R	2700K	400	82	89	Yes	40W	320°	15,000	120V	Silver Bowl	N.A. / N.A.
36073	5.5FG40DIM/927/R	2700K	500	92	91	Yes	60W	320°	15,000	120V	Clear	✓ / ✓

# DECORATIVE LINE



Suitable for All Decorative Applications



- Suitable to replace 40W / 60W incandescent lamps
- Suitable for use in totally enclosed fixtures
- Suitable for use in damp locations

## SPECIFICATIONS

Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	ES / T20
35165	3.8G25DIM/927	2700K	350	92	92	Yes	40W	280°	15,000	120V	Yes	✓/✓
34928	4B11DIM/827	2700K	300	82	75	Yes	40W	110°	25,000	120V	No	✓/N.A.
34929	4B11DIM/827/E26	2700K	300	82	75	Yes	40W	110°	25,000	120V	No	✓/N.A.
34930	6.5B13DIM/827	2700K	500	82	77	Yes	60W	230°	25,000	120V	No	✓/N.A.






**GREENCREATIVE**

**Your Partner for Professional Lighting Solutions**

2021 Q4



**Tel / Fax: (866) 774-5433**

**info@greencreative.com**

**www.greencreative.com**

**f** / GREENCREATIVELED

**t** / GClightingLED

**in** / GREEN-CREATIVE

 **ILLUMUS.**

An ILLUMUS Brand

[www.ILLUMUS.com](http://www.ILLUMUS.com)