



PROJECT NAME: \_\_\_\_\_ CAT. #: \_\_\_\_\_  
 NOTES: \_\_\_\_\_ FIXTURE SCHEDULE: \_\_\_\_\_

# WallMax Adjustable Thin Cutoff Series

15-29W



50-120W



### Product Description:

The WallMax Thin Cutoff is a versatile full cutoff wall fixture with an aesthetically pleasing look. It offers CCT and wattage selectability as well as changeable lenses. The housing is adjustable empowering the customer to create a variety of distribution patterns. Included standard is a photocell that can be turned on or off by the customer. This family covers a wide lumen range in 2 housing sizes. There is a battery backup option as well as the ability to add c-Max controls. Best of all, it is in the Value Series family bringing you many features in a price competitive package.

### Features:

- CCT (3000K, 4000K or 5000K) and wattage selectable
- Changeable lenses combined with adjustable housing create multiple distribution choices
- Universal Voltage: 120-277V
- Battery Backup option
- Compatible with c-Max (see accessories)
- Photocell included standard

### Construction:

- Die cast aluminum housing with corrosion resistant polyester powder coat finish
- UV stabilized impact resistant polycarbonate changeable lens

## Ordering Structure

FAMILY	FIXED WATTAGE (NOMINAL)	VOLTAGE	-	CCT	COLOR	CONTROLS OPTIONS	EM OPTIONS
WTC= WallMax Thin Cutoff Wallpack	15= 15W 50= 50W	U= Universal 120-277V	-	CS= 3/4/5K	B= Dark Bronze	PC= 120-277V Photocell included standard with on/off switch	E2= Battery Backup -20°C (factory installed)
	<b>WATTAGE SELECTABLE (NOMINAL)</b>			WCS= 3/4/5K, Wattage Selectable			
	25= 15/20/25W 29= 20/25/29W 75= 50/60/75W 120= 80/100/120W				Contact MaxLite for additional finishes		

Type 4 lens standard, see accessories for Type 3 lens

## DLC 5.1 Premium

MODEL SERIES	DLC PRODUCT ID	PRIMARY USE DESIGNATION
WTC15	S-M72LPL	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires
WTC25	S-1LYN9T	
WTC29	S-JLCKSM	



**5-year standard warranty** (further details available at [www.maxlite.com/warranties](http://www.maxlite.com/warranties))

Phone: 1-800-555-5629

Fax: 973-244-7333

Web: [www.maxlite.com](http://www.maxlite.com)

E-mail: [info@maxlite.com](mailto:info@maxlite.com)

PLM779

Rev: 08/08/2024

## WallMax Adjustable Thin Cutoff Series

### Accessories

MODEL NUMBER	ORDER CODE	DESCRIPTION	IMAGE
EM2-REMOTE-MT	111294	Field Installable Outdoor Battery Backup 120-277V (alternative to factory installed battery backup)	
WTC-T3LENS-SMALL	111242	FIELD INSTALLABLE TYPE III LENS FOR WTC 15-29W	
WTC-T3LENS-LARGE	111243	FIELD INSTALLABLE TYPE III LENS FOR WTC 75-120W	
CEA-RDB	107785	c-Max external adaptor bronze (white also available), must also use WCF-WTC-CEA-GASKET, enables use of c-Max round control nodes ( <a href="http://www.maxlite.com/cmox">www.maxlite.com/cmox</a> )	
WCF-WTC-CEA-GASKET	111248	Gasket must be used with CEA-RDB	

### Specifications


	WTC15	WTC25	WTC29	WTC50	WTC75	WTC120
Nominal Wattage (W)	15	15/20/25	20/25/29	50	50/60/75	80/100/120
Output (lm)	2,110-2,280	3,430-3,700	4,010-4,210	6,810-7,180	9,600-10,290	15,260-16,430
Efficacy (lm/W)	138-151	136-147	134-143	137-143	126-134	127-136
CCT	Selectable between 3/4/5K*					
CRI	>80					
Dimming	0-10V					
Controls	Integral Photocell (can turn on or off), c-Max compatible using CEA accessory					
Power Factor	>.90					
Input Voltage	120-277V					
Surge Protection	6kV					
Equivalency	50W	100W	150W	175W	250W	400W
Lumen Maintenance (L70)	>100,000 hrs					
Housing	Die cast aluminum with corrosion resistant polyester powder paint finish					
Lens	UV stabilized, impact resistant polycarbonate					
Listings	UL, FCC, DLC 5.1 Premium					
Environment	Wet Locations and IP65					
Warranty	5 years					

\* Fixtures are set at highest wattage and at 5000K

# WallMax Adjustable Thin Cutoff Series


## Dimensions

### 15-29W

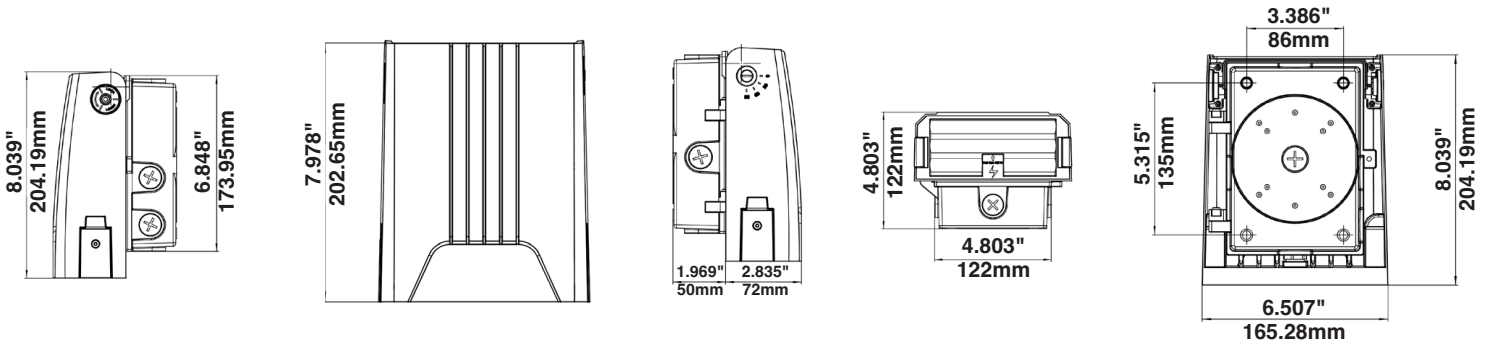

## Dimensions

### 50-120W

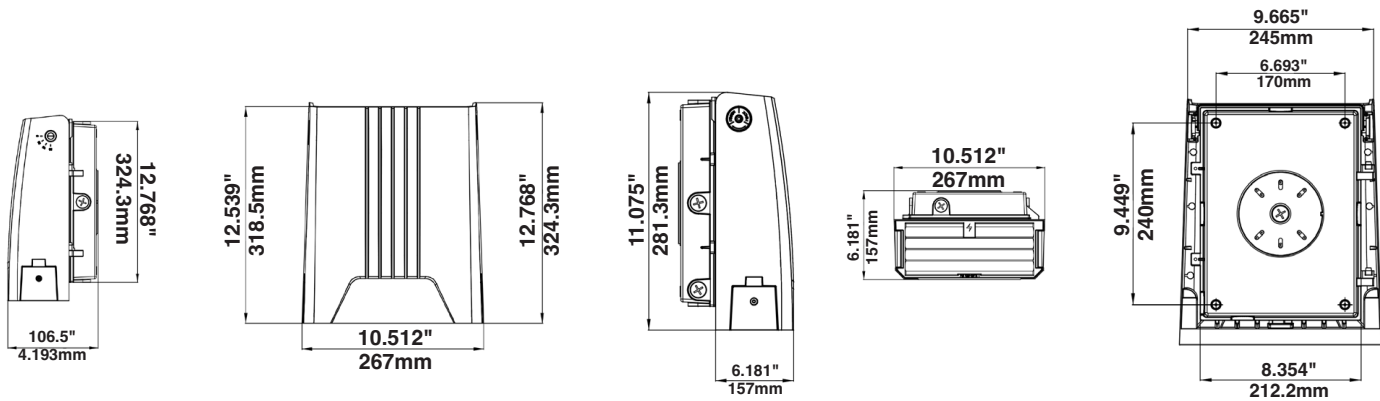



# WallMax Adjustable Thin Cutoff Series

## Photometric Footprint

### ISOFOOTCANDLE:

Each gridline represents one mounting height.

For mounting heights other than noted multiply FC by the below factor.

$$\text{Factor} = \frac{\text{Chart's Mtg Height}^2}{(\text{Actual Mtg Height})^2}$$


Layouts based on 3000K.

Results are 3-5% more for 4000/5000K.


Consult IES file for more precise calculations.

### LEGEND


- 0.1 fc
- 0.2 fc
- 0.5 fc
- 1 fc
- 2 fc

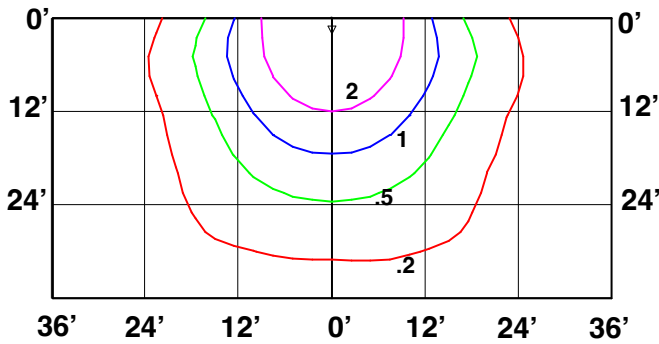


15W 12' mtg height

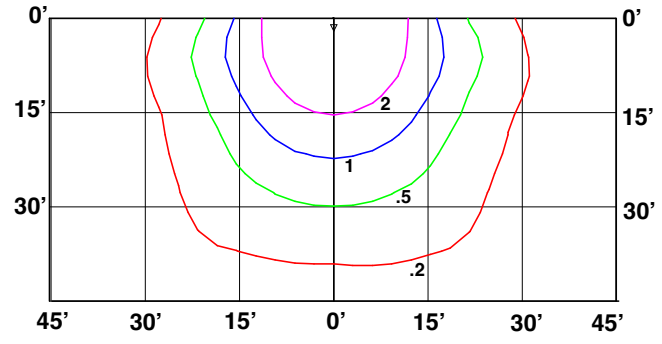


25W 15' mtg height

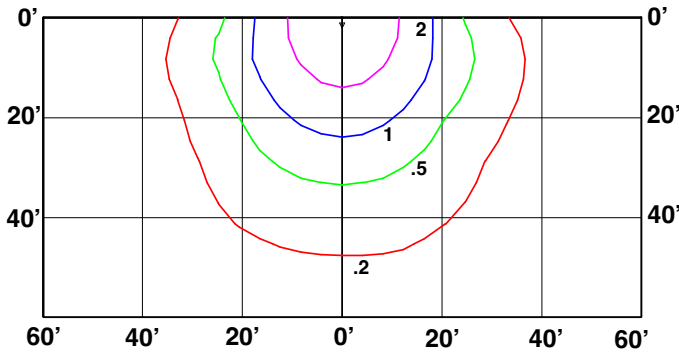


29W 20' mtg height

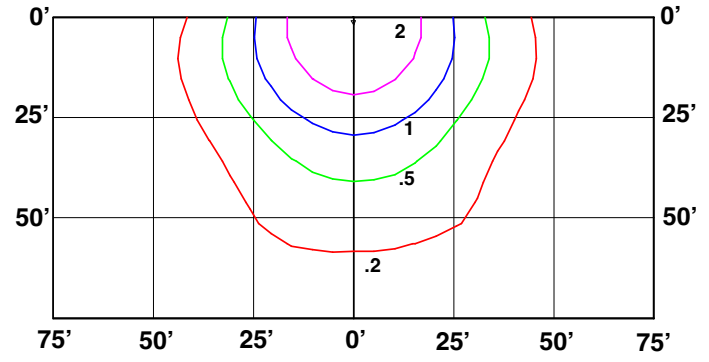

50W 25' mtg height

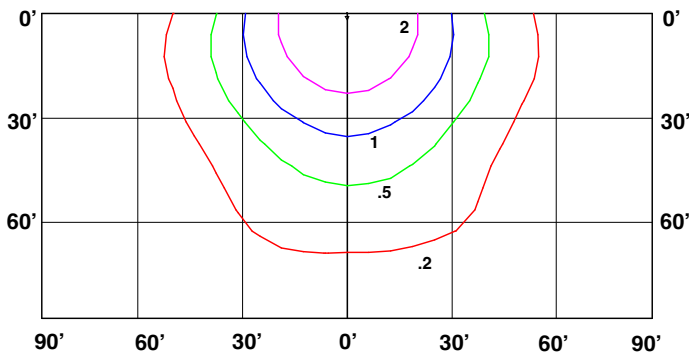

75W 30' mtg height

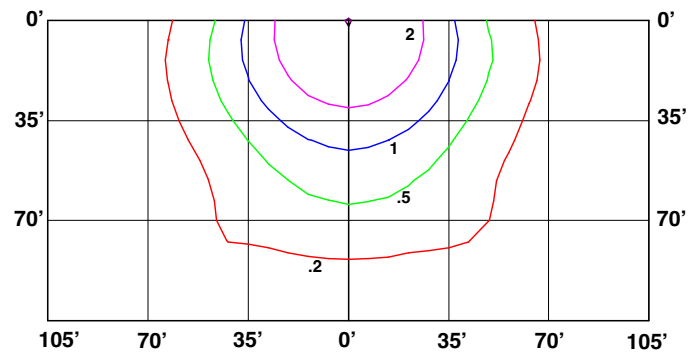

120W 35' mtg height