

PROJECT NAME: _____ CAT. #: _____
 NOTES: _____ FIXTURE SCHEDULE: _____

SLIM SMOOTH/BAFFLE ROUND DOWNLIGHT *SSRD & SBRD Series*

Smooth Trim

Baffle Trim

4"



6"



8"



Description:

The CCT Selectable Slim Downlights mount directly into the ceiling, requiring no can. With a simple flick of a switch on the remote driver junction box, installers can choose from 2700K, 3000K, 3500K, 4000K or 5000K as CCT to suit various application needs. Low profile and easy to install, the Flush style fixture is Energy Star, wet locations, IC rated and supports Title 24. Its edge lit optics provide an even and low glare illumination with an outstanding color rendering, making it the ideal choice for hospitality, retail, offices and multi-unit residential spaces.

Features:

- 2700K/ 3000K/3500K/4000K/5000K CCT Selectable
- CRI: ≥90
- Beam angle: 110°
- Universal mounting plate available
- Mounts into ceiling without the use of a separate housing
- Field installable Emergency Battery back up kit available

Dimming:

- 120V - TRIAC dimming

Construction:

- Frame: Polycarbonate
- Plastic lens: Polymethyl methacrylate

Listings:

- UL Certified for wet locations
- ENERGY STAR certified
- IC rated
- Airtight constructions
- Supports T24 Part 6 high efficacy lighting requirements

Ordering Information

FAMILY	SHAPE	SIZE	WATTAGE (NOMINAL)	CRI+ COLOR SELECTABLE	-	TRIM	PACK
SS = Slim Downlight Smooth Trim SB = Slim Downlight Baffle Trim	RD = Round	4R= 4"	10= 10.5W	9CS = 90 CRI, 2700/3000/3500/4000/5000 (Default is 3000K)	-	W = White	[BLANK]= 1 pack
		6R= 6"	13= 13W				[BLANK]= 1 pack -6PK 6 pack
		8R= 8"	23= 23W				[BLANK]= 1 pack



5-year standard warranty (further details available at www.maxlite.com/warranties)



SLIM SMOOTH/BAFFLE ROUND DOWNLIGHT SSRD & SBRD Series





Stocked Items

ORDER CODE	MODEL NUMBER	ENERGY STAR #
112155	SSRD-4R10.5T9CS-W	3722578
112156	SSRD-6R13T9CS-W	3722581
112157	SSRD-6R13T9CS-W-6PK	3722581
112158	SSRD-8R23T9CS-W	3722582
112159	SBRD-4R10.5T9CS-W	3722578
112160	SBRD-6R13T9CS-W	3722581
112161	SBRD-6R13T9CS-W-6PK	3722581
112162	SBRD-8R23T9CS-W	3722582

Dimming Compatibility

DIMMER BRAND	SERIES	DIMMER MODEL
LEGRAND	HARMONY	DCL453PTCCCV6
LEVITON	DECORA (SURESLIDE)	R12-06672-1LW
LUTRON	DIVA C-L	DVCL-153P
	DIVA C-L	DWVCL-153P-WH
	SKYLARK C-L	SCL-153P
	SKYLARK	CTCL-153PDH-WH

Accessories

ORDER CODE	MODEL NUMBER	DESCRIPTION	IMAGE
112240	SD-UNVTEMPLATE-2	SLIM DOWNLIGHT FAMILY, ROUGH IN TEMPLATE, UNIVERSAL ROUND 4 INCH, 6 INCH, 8 INCH - GEN 2	
109999	CDFK-4-10IN/2PK	COMMERCIAL DOWNLIGHT FRAME KIT, NEW CONSTRUCTION, 4", 6", 8" & 10" SIZE - 2 PACK	
100298	EBUUP15007N0100	EMERGENCY BATTERY BACK UP, 07W, 100-347V, FIELD INSTALLABLE	
112239	SDL-EXTCBL6-W	SLIM DOWNLIGHT EXTENSION CABLE, 6FT, WHITE	


Specifications

	SSRD-4R10.5T9CS-W SBRD-4R10.5T9CS-W	SSRD-6R13T9CS-W SBRD-6R13T9CS-W	SSRD-8R23T9CS-W SBRD-8R23T9CS-W
Power Consumption	10.5W	13W	23W
Equivalency	75W INC	75W INC	100W INC
Lumens Delivered	870 lm	1,100 lm	1,900 lm
Lumens Battery Mode (EBUUP15007N0100)	800	900	950
Efficacy	83 lm/w	84 lm/w	82 lm/w
Beam Angle	110°		
CRI	≥ 90		
Color Temperature (K)	2700K/3000K/3500K/4000K/5000K (Default is 3000K)		
L70 Lumen maintenance	≥ 50,000		
Power Factor	≥ 0.9		
Input Voltage	120V, 60Hz		
Dimming	TRIAC Dimming Range: 10%-100%		
Operating Temperature	-4°F to 104°F (-20°C to 40°C)		
Listings	ENERGY STAR, ULus, Title 24 Compliant, JA8, IC Rated, Airtight		
Environment	UL listed for wet location		
Warranty	5 Year Warranty		


SLIM SMOOTH/BAFFLE ROUND DOWNLIGHT *SSRD & SBRD Series*

Dimensions:

4" Smooth Style

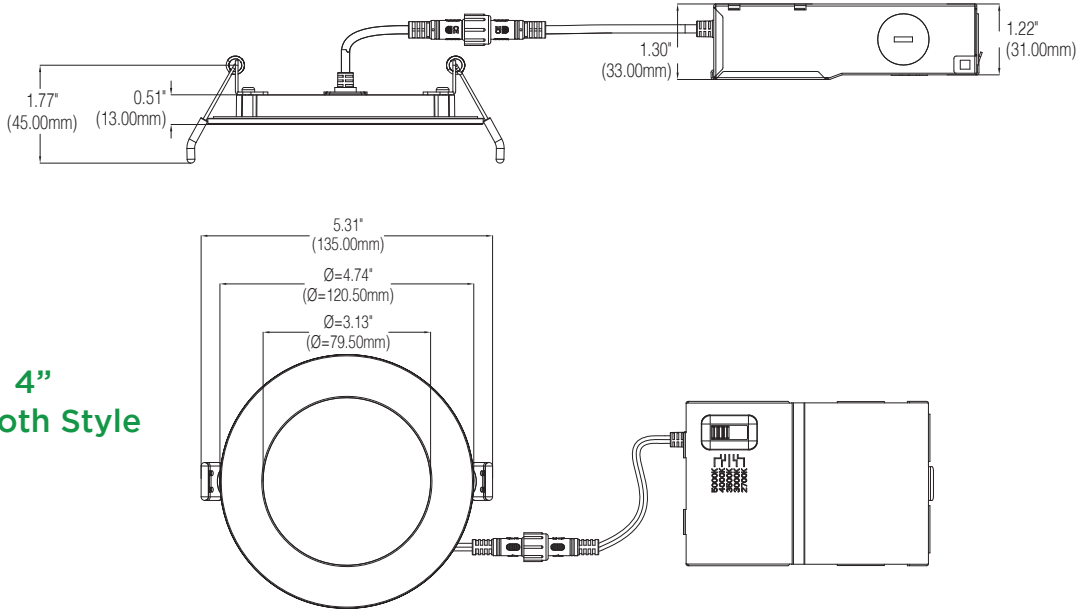

4" Baffle Style

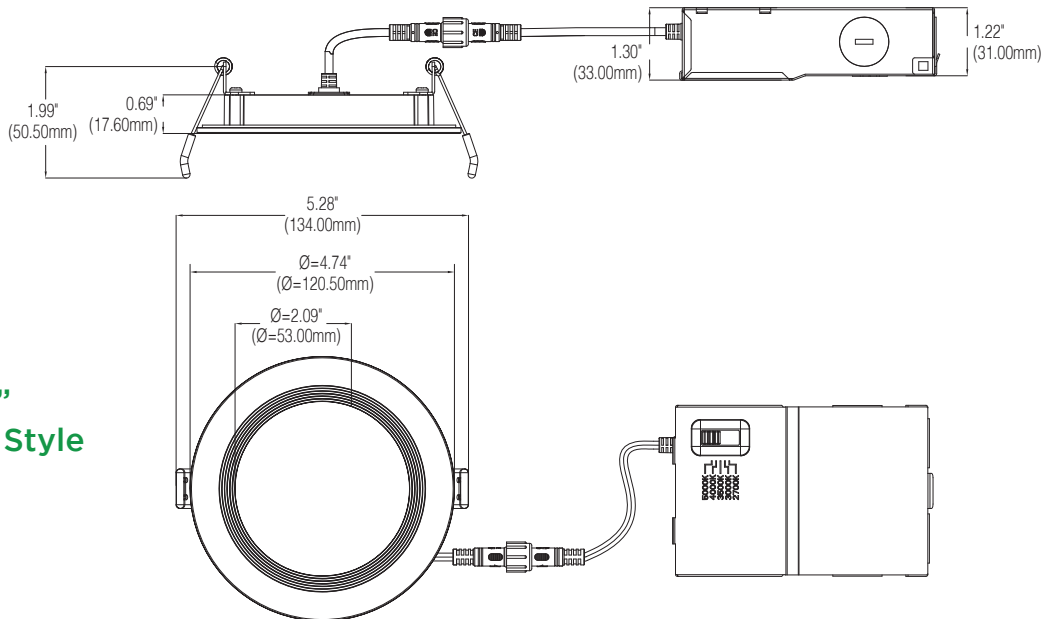


SLIM SMOOTH/BAFFLE ROUND DOWNLIGHT *SSRD & SBRD Series*


Dimensions:

6"

6" Smooth Style

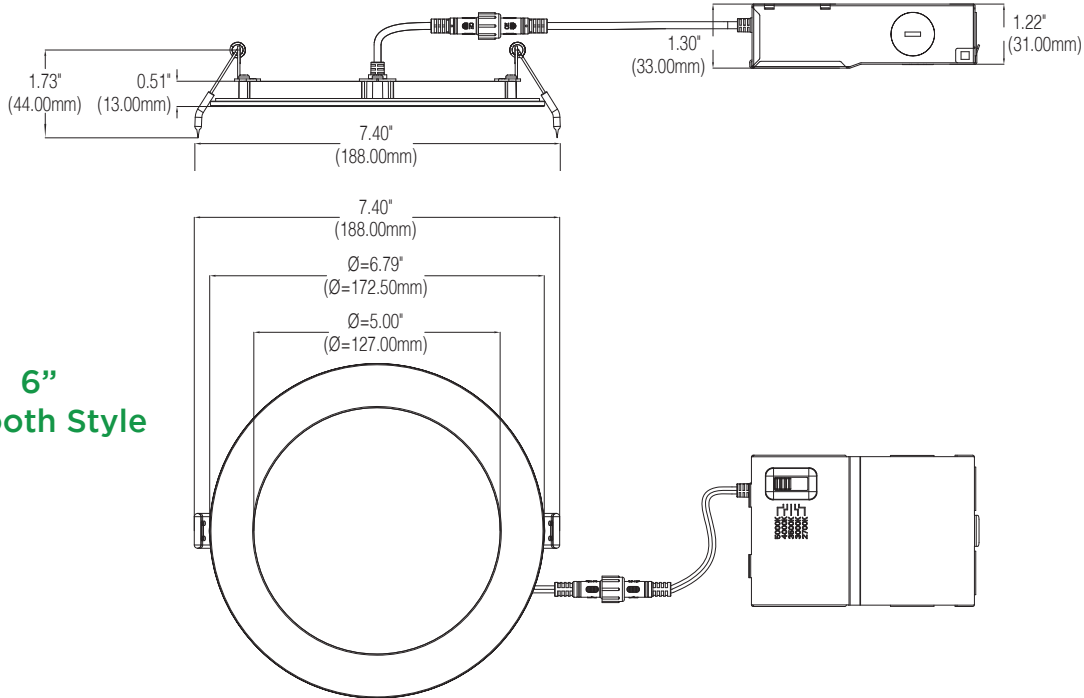


6" Baffle Style

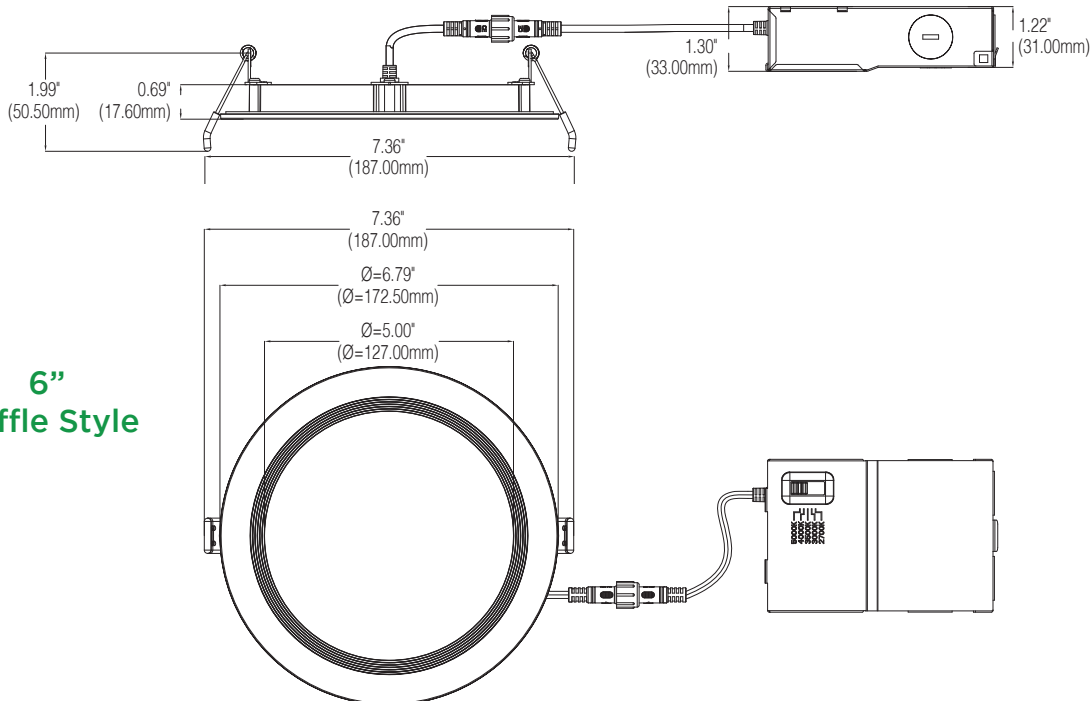



SLIM SMOOTH/BAFFLE ROUND DOWNLIGHT *SSRD & SBRD Series*

Dimensions:

8"

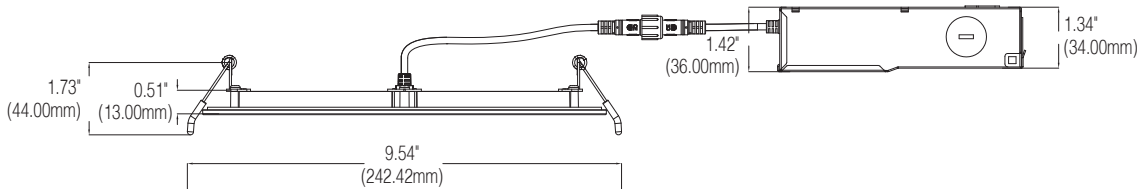

8" Smooth Style

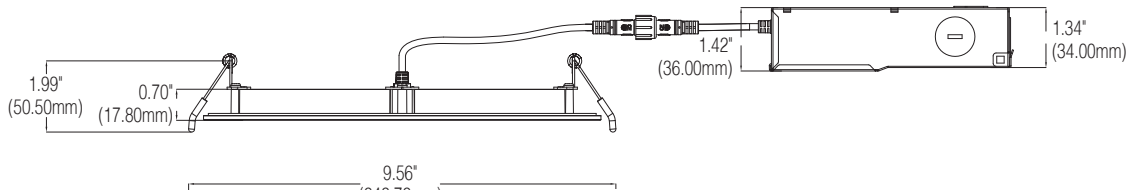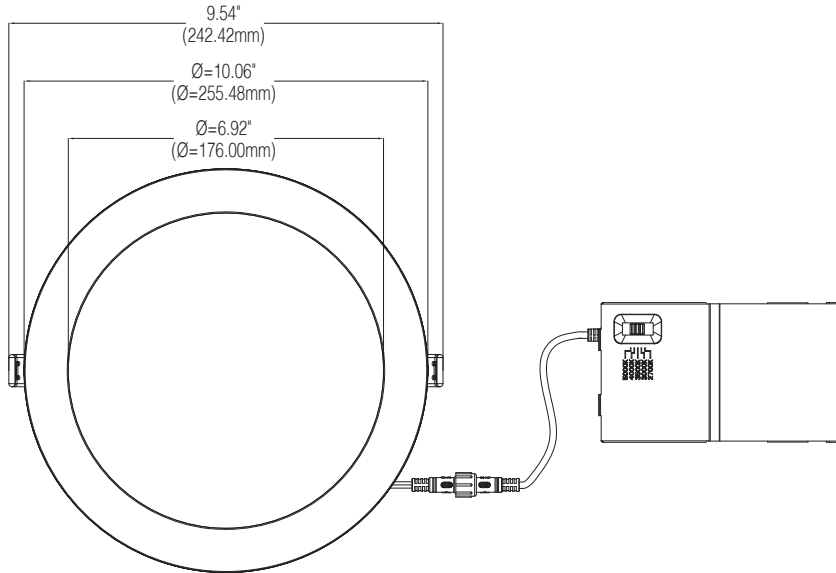

8" Baffle Style

