



PROJECT NAME: \_\_\_\_\_ CAT. #: \_\_\_\_\_  
 NOTES: \_\_\_\_\_ FIXTURE SCHEDULE: \_\_\_\_\_

## RESIDENTIAL RECESSED BAFFLE DOWNLIGHT RRBD Series



4"



6"



6" Wattage Selectable

### Description:

Constructed with a high-efficacy LED array, the Downlight Residential Retrofit series features an optical diffuser that produces high lumen transmission and even illumination. The fixtures are suitable for wet locations; available in 90 CRI with CCT selectability that includes 2700K/3000K/3500K/4000K/5000K. They are the economical solution for consumers looking to reduce energy costs.

### Features:

- 2700K/ 3000K/3500K/4000K/5000K CCT Selectable
- CRI: ≥90
- Beam angle: 95°
- Toolless installation
- E26 screw-base connector included

### Dimming:

- 120V - TRIAC dimming

### Construction:

- Diffuser: Polycarbonate
- Housing: Polybutylene terephthalate

### Listings:

- ETL Certified for wet locations
- ENERGY STAR certified
- Supports T24 Part 6 high efficacy lighting requirements

## Ordering Information

FAMILY	-	SIZE	WATTAGE (NOMINAL)	DIMMING	CRI & COLOR SELECTABLE	-	TRIM	PACK
RRBD= Residential Recessed Baffle Downlight	-	4= 4"	7.5= 7.5W	T= 120V only Triac dimming	9CS= 90 CRI, 2700/3000/ 3500/4000/5000K (Default is 3000K)	-	W= White	[BLANK]= 1 pack
		6= 6"	9.5= 9.5W					[BLANK]= 1 pack -6PK 6 pack
	SIZE	WATTAGE SELECTABLE	PACK					
		6= 6"	14W= 7.5/11/14W					[BLANK]= 1 pack



**5-year standard warranty** (further details available at [www.maxlite.com/warranties](http://www.maxlite.com/warranties))



## RESIDENTIAL RECESSED BAFFLE DOWNLIGHT

RRBD Series

### Stocked Items

ORDER CODE	MODEL NUMBER	ENERGY STAR #
112187	RRBD-4R7.5T9CS-W	3722583
112188	RRBD-6R9.5T9CS-W	3722585
112189	RRBD-6R9.5T9CS-W-6PK	3722585
112190	RRBD-6R14WT9CS-W	3722625

### Dimming Compatibility

DIMMER BRAND	SERIES	DIMMER MODEL
LEVITON	LLUMENA T ECH	R50-IPL06-10M
	SURESLIDE	NO.6672
LUTRON	DIVA C-L	DVCL-153P
	DIVA C-L	DVWCL-153PH-WH
	MAESTRO C-L	MACL-153M
	SKYLARK	CTCL-153PDH-WH
	SKYLARK C-L	SCL-153P
	TOGLER	TGCL-153PH-WH



### Specifications

	RRBD-4R7.5T9CS-W	RRBD-6R9.5T9CS-W	RRBD-6R14WT9CS-W
Power Consumption	7.5W	9.5W	7.5/11/14W (7.5W Default)
Equivalency	75W INC	75W INC	100W INC
Lumens Delivered @ 2700K	700 lm	900 lm	750/1050/1300 lm
Efficacy	87.5 lm/w	94 lm/w	100/95/92.8l lm/w
Beam Angle	95°		
CRI	≥ 90		
Color Temperature (K)	2700K/3000K/3500K/4000K/5000K (Default is 3000K)		
L70 Lumen maintenance	≥ 50,000		
Power Factor	≥ 0.9		
Input Voltage	120V, 60Hz		
Dimming	TRIAC Dimming Range: 10%-100%		
Operating Temperature	-4°F to 104°F (-20°C to 40°C)		
Listings	ENERGY STAR, ULus, Title 24 Compliant, JA8		
Environment	UL listed for wet location		
Warranty	5 Year Warranty		



## RESIDENTIAL RECESSED BAFFLE DOWNLIGHT *RRBD Series*

### Dimensions:

4"

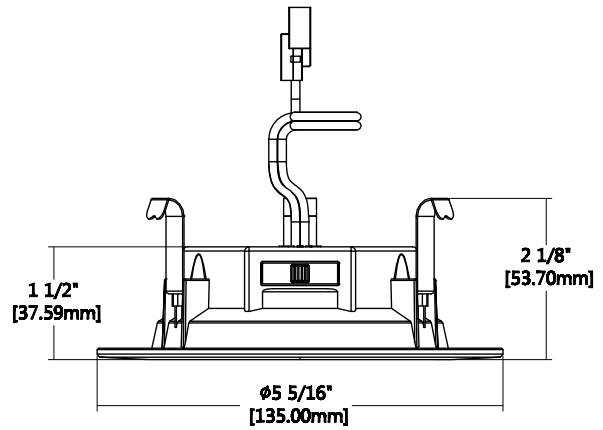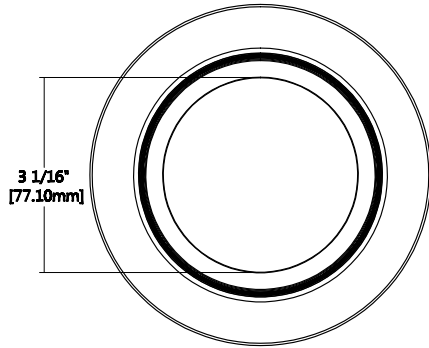

### 6" Non Wattage Selectable

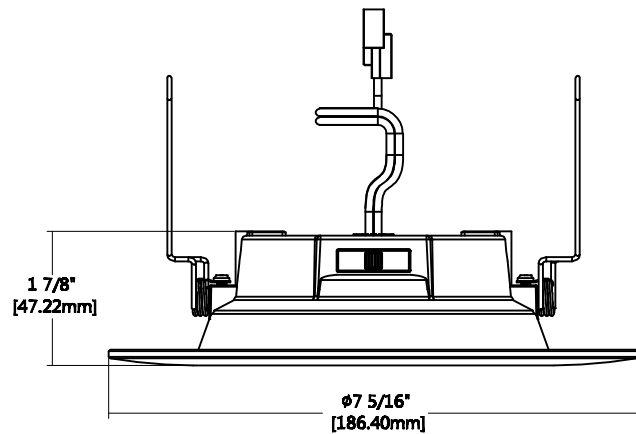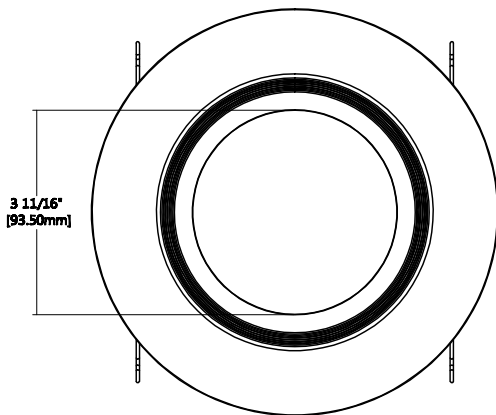

### 6" Wattage Selectable

