

PROJECT NAME: _____
NOTES: _____

CAT. #: _____
FIXTURE SCHEDULE: _____

Recessed Architectural Downlights

*RAD Series
Wattage and Color Selectable*



18W ENGINE WITH
ROUND REFLECTOR



30W ENGINE WITH
WALL WASHER

REFLECTORS



ROUND SILVER REFLECTOR
& WHITE TRIM



ROUND WHITE REFLECTOR
& WHITE TRIM



NEW CONSTRUCTION



Wattage
and CCT
switch



Beam
Angle
Selector



Locking
Mechanism

Product Description:

Introducing the Recessed Architectural Downlight (RAD) series – a revolutionary modular system designed to future-proof your lighting solutions. Each RAD light engine is packed with features, making it the simplest and most efficient way to upgrade incandescent, fluorescent, or metal halide downlights to state-of-the-art LEDs. The light engine offers three wattage options, five CCT selections, and two beam angles, all in one package. With its multi-mode dimming capabilities supporting Triac, ELV, and 0-10V dimming, as well as its 12v aux output that can be paired with Maxlite's patented c-Max control system, this provides the most versatile Luminare Level Lighting controls (LLC) option for Downlights in the industry.

Paired with multiple sizes of downlight or wall-wash reflectors, this Energy Star 1.0 qualified downlight ensures top-tier energy efficiency and performance. Whether for retrofit or new construction, the RAD series provides the most cost-effective solution for replacing architectural downlights, delivering significant energy savings and superior lighting quality.

Features:

- 12v aux for c-Max compatibility
- Wattage and CCT select Light Engines with Adjustable Beam Angles
 - 12/16/20W Engine: 25°-45°
 - 18/24/30W Engine: 25°-45°
 - 30/40/50W Engine: 30°-50°
- Downlight and Wall-Wash Reflectors available in Silver and White finish
- Multi-Mode dimming supporting Triac / ELV (at 120v) and 0-10V dimming (at 120-277V)
- 12V aux for c-Max compatibility
- Field Installable Emergency Battery Back Up Available

Multimode Dimming:

- 0-10v dimming 120-277V
- Triac / ELV 120V only

Listings:

- ETL Listed for damp locations, indoor
- ETL Classified for damp locations, indoor
- Energy Star V1.0 qualified

Ordering Information

Step 1 - Select the light engine

FAMILY	DIMMING MODE	-	WATTAGE	CCT	SOURCE
RAD= Recessed Architectural Downlight Light Engine	M= Multi-Mode (0-10V & TRIAC)	-	12W= 12/16/20W Selectable 18W= 18/24/30W Selectable 30W= 30/40/50W Selectable	CS= 27/30/35/40/50 CCT Selectable	[BLANK]= Blank TA= TAA Compliant

Step 2 - Select the reflector

FAMILY	TYPE	SIZE	REFLECTOR FINISH	FLANGE FINISH	SOURCE
RAD= Recessed Architectural Downlight Reflector	R= Round Downlight	4= 4" reflector** 6= 6" reflector 8= 8" reflector 10= 10" reflector	M= Matte Silver W= White	W= White	[BLANK]= Blank TA= TAA Compliant
	W= Round Wall Wash	6= 6" reflector 8= 8" reflector 10= 10" reflector			

**Not compatible for 30W engine

For new construction, order CDFK-4-10IN/2PK (sold separately)



5-year standard warranty (further details available at www.maxlite.com/warranties)

Recessed Architectural Downlights

*RAD Series
Wattage and Color Selectable*

Stocked Items (Engines)

MODEL NUMBER	ORDER CODE	ENERGY STAR
RADM-12WCS	112673	3999598
RADM-18WCS	112674	3999599
RADM-30WCS	112675	3999600
RADM-12WCSTA	112315	3999598
RADM-18WCSTA	112316	3999599
RADM-30WCSTA	112317	3999600

Stocked Items (Round Reflectors)

MODEL NUMBER	ORDER CODE	REFLECTOR COLOR	TRIM COLOR	REFLECTOR SIZE
RADR-4MW	112676	Silver	White	4"
RADR-4WWTA	112325	White	White	4"
RADR-6MW	112677	Silver	White	6"
RADR-6WWTA	112326	White	White	6"
RADR-8MW	112678	Silver	White	8"
RADR-8WWTA	112327	White	White	8"
RADR-10MW	112679	Silver	White	10"

Stocked Items (Wall Wash Reflectors)

MODEL NUMBER	ORDER CODE	REFLECTOR COLOR	TRIM COLOR	REFLECTOR SIZE
RADW-6MWTa	112322	Silver	White	6"
RADW-8MWTa	112323	Silver	White	8"

Specifications

Specifications		RADM-12WCS	RADM-18WCS	RADM-30WCS
LUMENS (lm) @ 2700K	4" Round Reflector	1150/1500/1800	1900/2400/2800	N/A
	6" Round Reflector			2900/3800/4500
	8" Round Reflector			
	10" Round Reflector			
CRI		≥ 90		
CCT (K)		2700K/3000K/3500K/4000K/5000K CCT Selectable (Default CCT: 2700K)		
L70 LIFETIME (hrs)		≥ 50,000		
VOLTAGE		120-277V, 120V		
POWER FACTOR		≥ 0.9		
BBU		Available (see accessory table)		
LISTINGS		ETL Listed & Classified, ENERGY STAR V1.0		
ENVIRONMENT		Damp locations		
WARRANTY		5 years		

BBU Lumen Output - EBUUP17015N200B

Model Number	Wattage Setting	EM lumen - 90 mins
RADM-12WCS	12W	Min 600lm
	16W	Min 800lm
	20W	Min 1000lm
RADM-18WCS	18W	Min 1000lm
	24W	Min 1100lm
	30W	Min 1100lm

BBU Lumen Output - EBUUP17015N200B

Model Number	Wattage Setting	EM lumen - 90 mins
RADM-30WCS	30W	Min 1100lm
	40W	Min 1100lm
	50W	Min 1100lm

Recessed Architectural Downlights

*RAD Series
Wattage and Color Selectable*

Compatible Dimmers

DIMMER BRAND	SERIES	DIMMER MODEL	DIMMING
LEVITON	-	IP710-LFZ	0-10V
LEVITON	-	DVSTV-WH	0-10V
COOPER	-	DF10PC1	0-10V
LEGRAND	Radiant	RHCL453PTC	TRIAC
LEGRAND	Harmony	DCL453PTCCCV6	TRIAC
LEGRAND	Harmony	HCL453PTCCCV6	TRIAC


Compatible Dimmers

DIMMER BRAND	SERIES	DIMMER MODEL	DIMMING
LEVITON	Sureslide	Cat.NO.6674	TRIAC
LEVITON	Illumena Tech	R50-IPL06-10M	TRIAC
LUTRON	Maestro C-L	MACL-153M	TRIAC
LUTRON	Skylark C-L	SCL-153P	TRIAC
LUTRON	Diva C-L	DVCL-153P	TRIAC
LUTRON		TGCL-153PH-WH	TRIAC
LUTRON	Skylark	CTCL-153PDH-WH	TRIAC
LUTRON	Diva C-L	DVWCL-153PH-WH	TRIAC

Accessories Table (Sold Separately)

ORDER CODE	MODEL NUMBER	DESCRIPTION	IMAGE
CDFK-4-10IN/2PK	109999	COMMERCIAL DOWNLIGHT FRAME KIT, NEW CONSTRUCTION, 4", 6", 8" & 10" SIZE - 2 PACK	
EBUUP17015N200B	108566	EMERGENCY INVERTER, 15W, 120-347VAC, CEC COMPLIANT, FIELD INSTALLABLE	

c-Max Controls Microsites and Compatibility Guide



Product Compatibility Guide

Compatible Controls (SOLD SEPARATELY)+


The table below shows a small subset of control nodes from each tier works with the fixture.
Refer to individual microsites above for more accessories that could be added based on application requirements.

ORDER CODE	MODEL NUMBER & LINK TO DATA SHEET	DESCRIPTION	QR CODE TO DATA SHEET	IMAGE
c-Max Network				
105895	NN-MGT	NETWORK NODE MAGNET, TRANSLUCENT		
107791	CNSL-PSW	C-MAX NETWORK SENSOR 12V, BLUETOOTH/ PIR MOTION SENSOR / DAYLIGHT HARVEST, WHITE		
c-Max Network Partners - Silvaire				
112395	NN-MGT-SL	SILVAIRE NETWORK NODE MAGNET, TRANSLUCENT		
111145	CNSL-PSW-SL	SILVAIRE CEILING SENSOR 12-24V, BLUETOOTH/ PIR MOTION SENSOR, DAYLIGHT HARVEST, WHITE		


Recessed Architectural Downlights

*RAD Series
Wattage and Color Selectable*

Dimensions

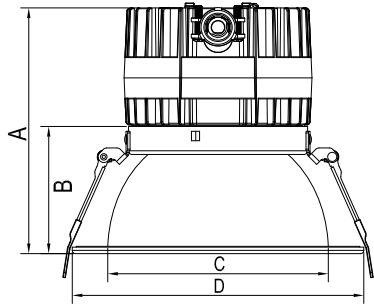

Round Reflector

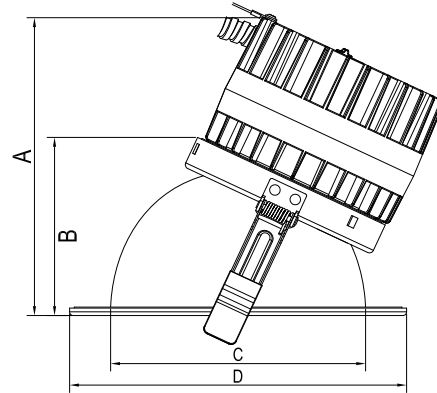

Wall Washer Reflector

LIGHT ENGINE	REFLECTOR TYPE	REFLECTOR SIZE	FIXTURE HEIGHT (A)	REFLECTOR HEIGHT (B)	INNER DIAMETER	OUTER DIAMETER (D)	CUT-OUTS (INCHES)
RADM-12WCS** RADM-18WCS**	STANDARD	4"	5.39	2.56	4.07	5.51	4.84-5.04
		6"	5.98	3.07	5.24	7.09	6.22-6.50
		8"	6.5	3.62	7.09	9.06	7.28-7.72
		10"	7.05	4.17	8.9	11.02	9.13-9.76
RADM-30WCS**	STANDARD	6"	5.94	3.07	5.24	7.09	6.22-6.50
		8"	6.46	3.62	7.09	9.06	7.28-7.72
		10"	7.01	4.17	8.9	11.02	9.13-9.76
RADM-12WCS** RADM-18WCS**	WALL WASHER	6"	6.26	3.74	5.24	7.09	6.22-6.50
		8"	6.81	4.19	7.09	9.06	7.28-7.72
		10"	7.24	4.65	8.9	11.02	9.13-9.76
RADM-30WCS**	WALL WASHER	6"	6.5	3.74	5.24	7.09	6.22-6.50
		8"	7.01	4.19	7.09	9.06	7.28-7.72
		10"	7.44	4.65	8.9	11.02	9.13-9.76