

SCM SLIM CANOPY LARGE 13" x 13"

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

naturaLED® slim canopy large is DLC Premium listed and ETL with a rating of IP65. Aesthetically pleasing construction, low-profile design with die-cast aluminum housing and shatter-resistant polycarbonate prismatic lens. Dustproof, sealed structure, 1/2" NPT threaded conduit entrances on each side. This fixture comes with optional motion sensor providing: step dimming, area sensitivity, standby time and on/off. The canopy supports both pendant mounting and direct surface mounting ceiling and wall. The Slim Canopy fixture can be Pendant Mounted and accepts a 3/4" NPT threaded and can be mounted to multiple types of J-boxes.


APPLICATIONS

Warehouses, Parking Garages, Offices, Factories, Hospitals, Hotels

FEATURES

- DLC Premium Qualified
- IP65 Rated
- ETL Listed
- ColorTemp: 4000K, 5000K
- Dimmable: 1-10V
- Input line voltage: 120-277V
- CRI: 80
- Powerfactor >0.9
- Surge Protection: 4KV
- Beam Angle: 160°
- Material: aluminum die-cast
- Shatter-resistant polycarbonate lens
- Operating temperature: - 40°F - 122°F
- 5 Year Warranty
- Finish: Black
- Optional for Purchase: Emergency Driver, Motion Sensor, Beauty Plate

DISTRIBUTION PATTERN

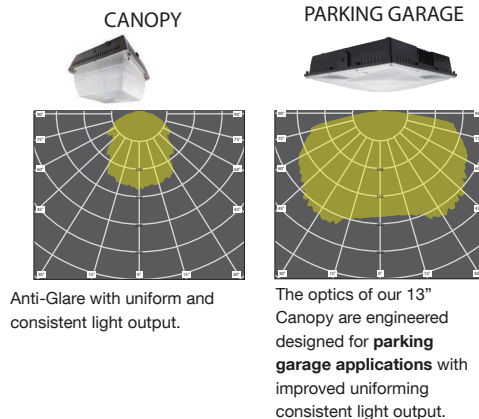

Rated Life 50,000 Hours
Warranty 5 Years

ACCESSORIES

- Beauty Plate
- Emergency Driver
- Motion Sensor
- Surge Protection

SAMPLE NUMBER FX13SCM60/840/BK

FAMILY	SIZE	SERIES	WATTAGE	CRI/COLOR TEMP	COLOR
FX Fixture	13 13-inch	SCM Slim Canopy	60 60 Watt	840 CRI 80 4000K	BK Black



SLIM CANOPY LARGE 13" x 13"

CEILING & AREA LUMINAIRES

ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Dim (V)	Size	IP65 Rated	DLC (S/P)
59	9426	FX13SCM60/840/BK	4000K	7,737	250	1-10V	13"x13"	•	P
59	9427	FX13SCM60/850/BK	5000K	7,890	250	1-10V	13"x13"	•	P
82	9428	FX13SCM85/840/BK	4000K	10,062	400	1-10V	13"x13"	•	P
82	9429	FX13SCM85/850/BK	5000K	10,259	400	1-10V	13"x13"	•	P
100	9430	FX13SCM100/840/BK	4000K	13,238	>400	1-10V	13"x13"	•	P
100	9431	FX13SCM100/850/BK	5000K	13,620	>400	1-10V	13"x13"	•	P
59	9245	LED-FXSCM60/50K/BK	5000K	7,910	250	1-10V	13"x13"	•	P
82	9248	LED-FXSCM85/40K/BK	4000K	10,062	400	1-10V	13"x13"	•	P
82	9249	LED-FXSCM85/50K/BK	5000K	10,259	400	1-10V	13"x13"	•	P
100	9211	LED-FXSCM100/40K/BK	4000K	12,795	>400	1-10V	13"x13"	•	P
100	9212	LED-FXSCM100/50K/BK	5000K	13,022	>400	1-10V	13"x13"	•	P

ACCESSORIES (Ordered Separately)

Emergency Driver



7334 BAEM15-48BC/MV-A
(Emergency Backup Driver 120-277V)

Beauty Plates



P10195 PLT-SCM/14X14/WH
(14"x14" Beauty Plate used with SCM)



P10196 PLT-SCM/24X24/WH
(24"x24" Beauty Plate used with SCM)

Surge Protection



P10389 SPD-L-10KV-277
(Surge Protection 10KV 120-277V)



P10390 SPD-L-20KV-277
(Surge Protection 20KV 120-277V)


Motion Sensor



P10234 SEN-MC605V-D
(Built-In Motion Sensor 120-277V)


DIMENSIONS

59W 8.45-lbs
82W 8.45-lbs
100W 11.00-lbs

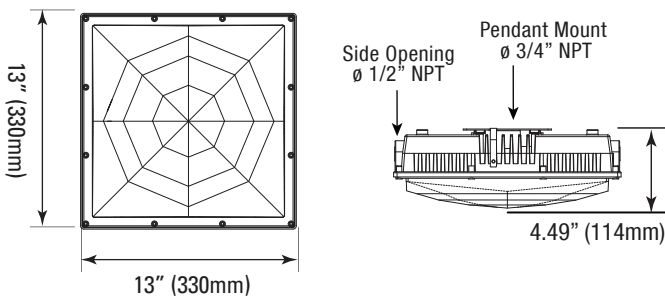

PHOTOMETRICS CHART


59 Watt
DLC Premium



Distance	Center Beam Fc	Beam Width
3.3ft	1.26 Fc	28.3 R - 37.8 R
4.7ft	30.5 Fc	57.5 R - 76.7 R
6.0ft	13.7 Fc	85.8 R - 114.5 R
7.3ft	7.75 Fc	114.1 R - 152.3 R
8.7ft	4.91 Fc	143.2 R - 191.2 R
10.0ft	3.43 Fc	171.5 R - 229.0 R

■ Watt. Spread: 153.3°
■ Horiz. Spread: 160.2°


82 Watt
DLC Premium



Distance	Center Beam Fc	Beam Width
3.3ft	1.76 Fc	32.3 R - 38.0 R
4.7ft	42.7 Fc	56.7 R - 73.4 R
6.0ft	19.2 Fc	84.6 R - 109.0 R
7.3ft	10.8 Fc	112.5 R - 145.0 R
8.7ft	6.88 Fc	141.3 R - 182.1 R
10.0ft	4.80 Fc	169.2 R - 218.1 R

■ Watt. Spread: 153.4°
■ Horiz. Spread: 159.2°

100 Watt
DLC Premium



Distance	Center Beam Fc	Beam Width
3.3ft	2.14 Fc	34.1 R - 32.9 R
4.7ft	51.1 Fc	75.3 R - 86.8 R
6.0ft	22.9 Fc	112.4 R - 99.7 R
7.3ft	13.0 Fc	149.5 R - 132.5 R
8.7ft	8.22 Fc	187.8 R - 166.5 R
10.0ft	5.73 Fc	224.9 R - 199.4 R

■ Watt. Spread: 159.8°
■ Horiz. Spread: 157.3°

PACKAGE

Case Qty 1 pc

