

LED MINI WALL PACKS • 12W/25W

INSTALL INSTRUCTIONS



PLEASE FIND A QUALIFIED ELECTRICIAN FOR INSTALLATION. Please read the instructions before you install and use the fixture. Retain for future reference.

CAUTIONS & SAFETY INSTRUCTIONS

- This fixture should be installed or maintained in accordance with the National Electrical Code (NEC) and applicable local codes and ordinances by a professional who is familiar with the construction and operation of the product and hazards involved.
- Proper grounding is required to insure personal safety. Carefully observe the correct grounding procedure under the installation section.
- Disconnect power before installing.
- Check that the voltage is compatible with the fixture driver, use approved connectors for all electrical connections.
- Review diagrams before beginning.
- Suitable for wet locations.

CLEANING & MAINTENANCE

- Disconnect power before servicing fixture.
- Allow fixture to cool before handling.
- Do not open fixture to clean or touch LED chips.
- Use non-abrasive glass cleaning solution to clean lens and housing.

! WARNING DISCONNECT POWER BEFORE INSTALLING OR SERVICING.

INSTALLATION INSTRUCTIONS

Tools needed: Phillips head screwdriver and electrical tools.

1. Turn off power before connecting wires.
2. Remove the lens by loosening the screws on each side (Fig. 1) and remove the reflector by loosening the screws in the center (Fig. 2)
3. Knock out the appropriate holes on the back side with a drill where necessary. (Fig. 3)
4. Pull the wire from the J-box through the center hole, and attach the fixture to the J-box with proper screws. (Fig. 4) Apply silicone sealant (not provided) to any mounting holes to prevent water entry.
5. Refer to General Wiring Diagram: Connect Black to Line, White to Neutral and Green to Ground. For 0-10V Dimming: Connect Purple* to Dim (+) and Gray* to Dim (-). **Note:** For non-dimming applications, cap the purple and gray dimming wires separately. Failure to do so may cause malfunctioning and void warranty.
6. Replace the reflector and lens carefully by reversing procedure used to remove it. (Fig. 5) Installation is complete.

Fig. 1




Fig. 2







Fig. 3

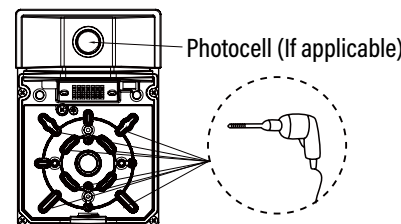

GENERAL WIRING DIAGRAM

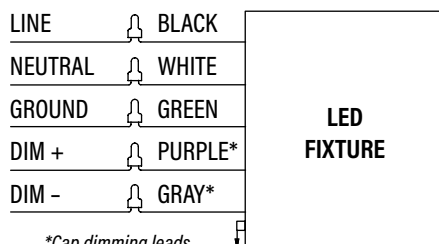

*Cap dimming leads separately if unused.

Fig. 4

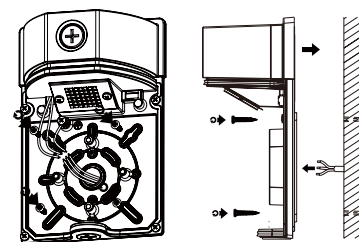


Fig. 5

