
8162H

120V-277V Universal Voltage

Catalog #:	Туре
Project:	Date
Prepared by:	

6" LED High Output Architectural Housing



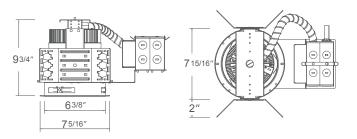

DESCRIPTION

The 8162H housing - frame/trim combo balances power, efficiency and cost to bring you the options needed to complete a variety of commercial projects with a reliable and modern down light solution.

DESIGN FEATURES

Electrical

- 120V-277V Universal Voltage
- 50,000 hour projected life
- Beam angle 63°
- Triac 120V & 0-10V dimming

LED module and Trim

- Aluminum extruded heat sink designed to facilitate heat dissipation to reduce LED junction temperature for maintaining constant light output, color and life of solid state components
- Heavy gauge aluminum anodized reflector in a clear finish

Junction Box

J-Box has eight 1/2" knockouts and four non-metallic cable knockouts with strain clamps

Mounting Plate

20-gauge CRS mounting ring, 1-5/8" deep collar may be used for various thickness of ceiling materials

LED Power Supply Driver

- 120-277V input high efficacy drivers with the capability
 - 1. A Triac 120V low voltage electronic dimmer switches
 - 2. By 0-10V dimmer switches
- Driver power factor ≥ 9, THD ≤ 20% and has integral thermal protection to sense over temperature or internal failure. Driver mounts externally to the module, which, if needed allows for future replacement

Option

- 8096B Two Piece Bar Hangers 24" Joist Span
- Emergency Backup: 8162H-__--EM

Certifications

- cULus listed
- 5 year limited warranty







8162H

120V-60Hz

Specification & Ordering

HOUSING					Example: 8162H-50-3K-EM
Housing #		Wattage		Color Temp	Emergency
	8162H				
	8162H	-50 -60 -70 -90	: 50W, 3438lms : 60W, 4265lms : 70W, 4921lms : 90W, 5798lms	-3K : 3000K -4K : 4000K	-EM : adds Battery Pack

MODULE/TRIM			Example: 8656HZ	
Module/Trim #			Finish	
	8656HZ Haze Cone Reflector	HZ	: Haze	

RP LIGHTING · FANS