

LED TECHNOLOGY

50,000 Hours Life, 150/120/100 Watt, 100-277VAC 60Hz


Applications:

Parking Lots, Wall Wash, Security Lighting, Land Lighting

Features:

- Adjustable Wattage 150/120/100 Watt
- Adjustable 3CCT 3000K, 4000K, 5000K
- Aluminum Rust Proof Body
- Instant Start Electronic Unit
- Suitable For Wet Location(IP65)
- Includes Yoke Arm Mount
- Includes Removable Dusk to Dawn Photocell


Luminous Intensity Distribution Curve

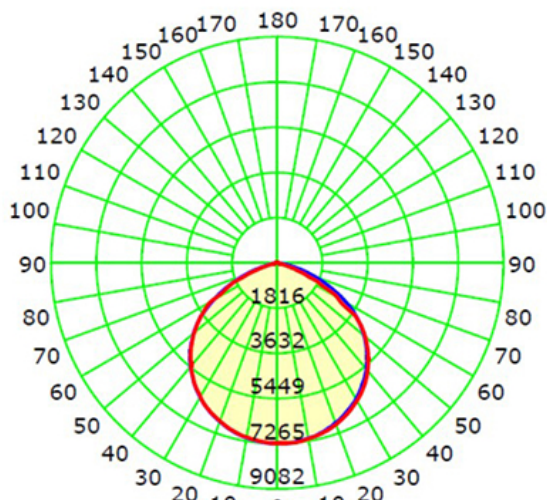

Unit: cd

Average Diffuse Angle(50%): 112.7°

— C0-C180 — C90-C270

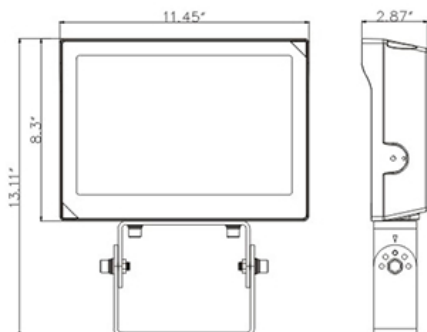

Life Hours

50,000

ADJUSTABLE WATT

150 WATTS	21,750 LUMENS
120 WATTS	17,400 LUMENS
100 WATTS	14,500 LUMENS


ADJUSTABLE LIGHT COLOR

3000K WARM WHITE
4000K COOL WHITE
5000K DAY LIGHT



Specification:

Input Line Voltage:	100-277VAC
Input Power	150/120/100W
Input Line Frequency	60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-20°C/-4°F
Maximum Operating Temp	40°C/104°F
Adjustable CCT	3000K/4000K/5000K
CRI	≥80
Lumens	21750/17400/14500
CBCP	7249

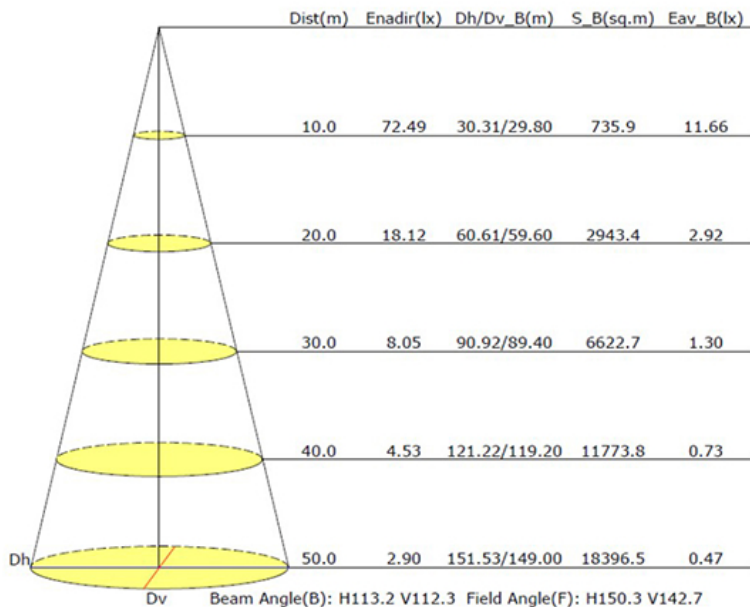

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Model:#	Description	wattage	lumens
LF150BZ/CCT	150/120/100Watt LED Flood Light Bronze Color, Adjustable 3CCT 3000K,4000K, 5000K	150W 120W 100W	21750 17400 14500

* 5 Year Limited Warranty

UPC: 80680215497-8

